

1/16

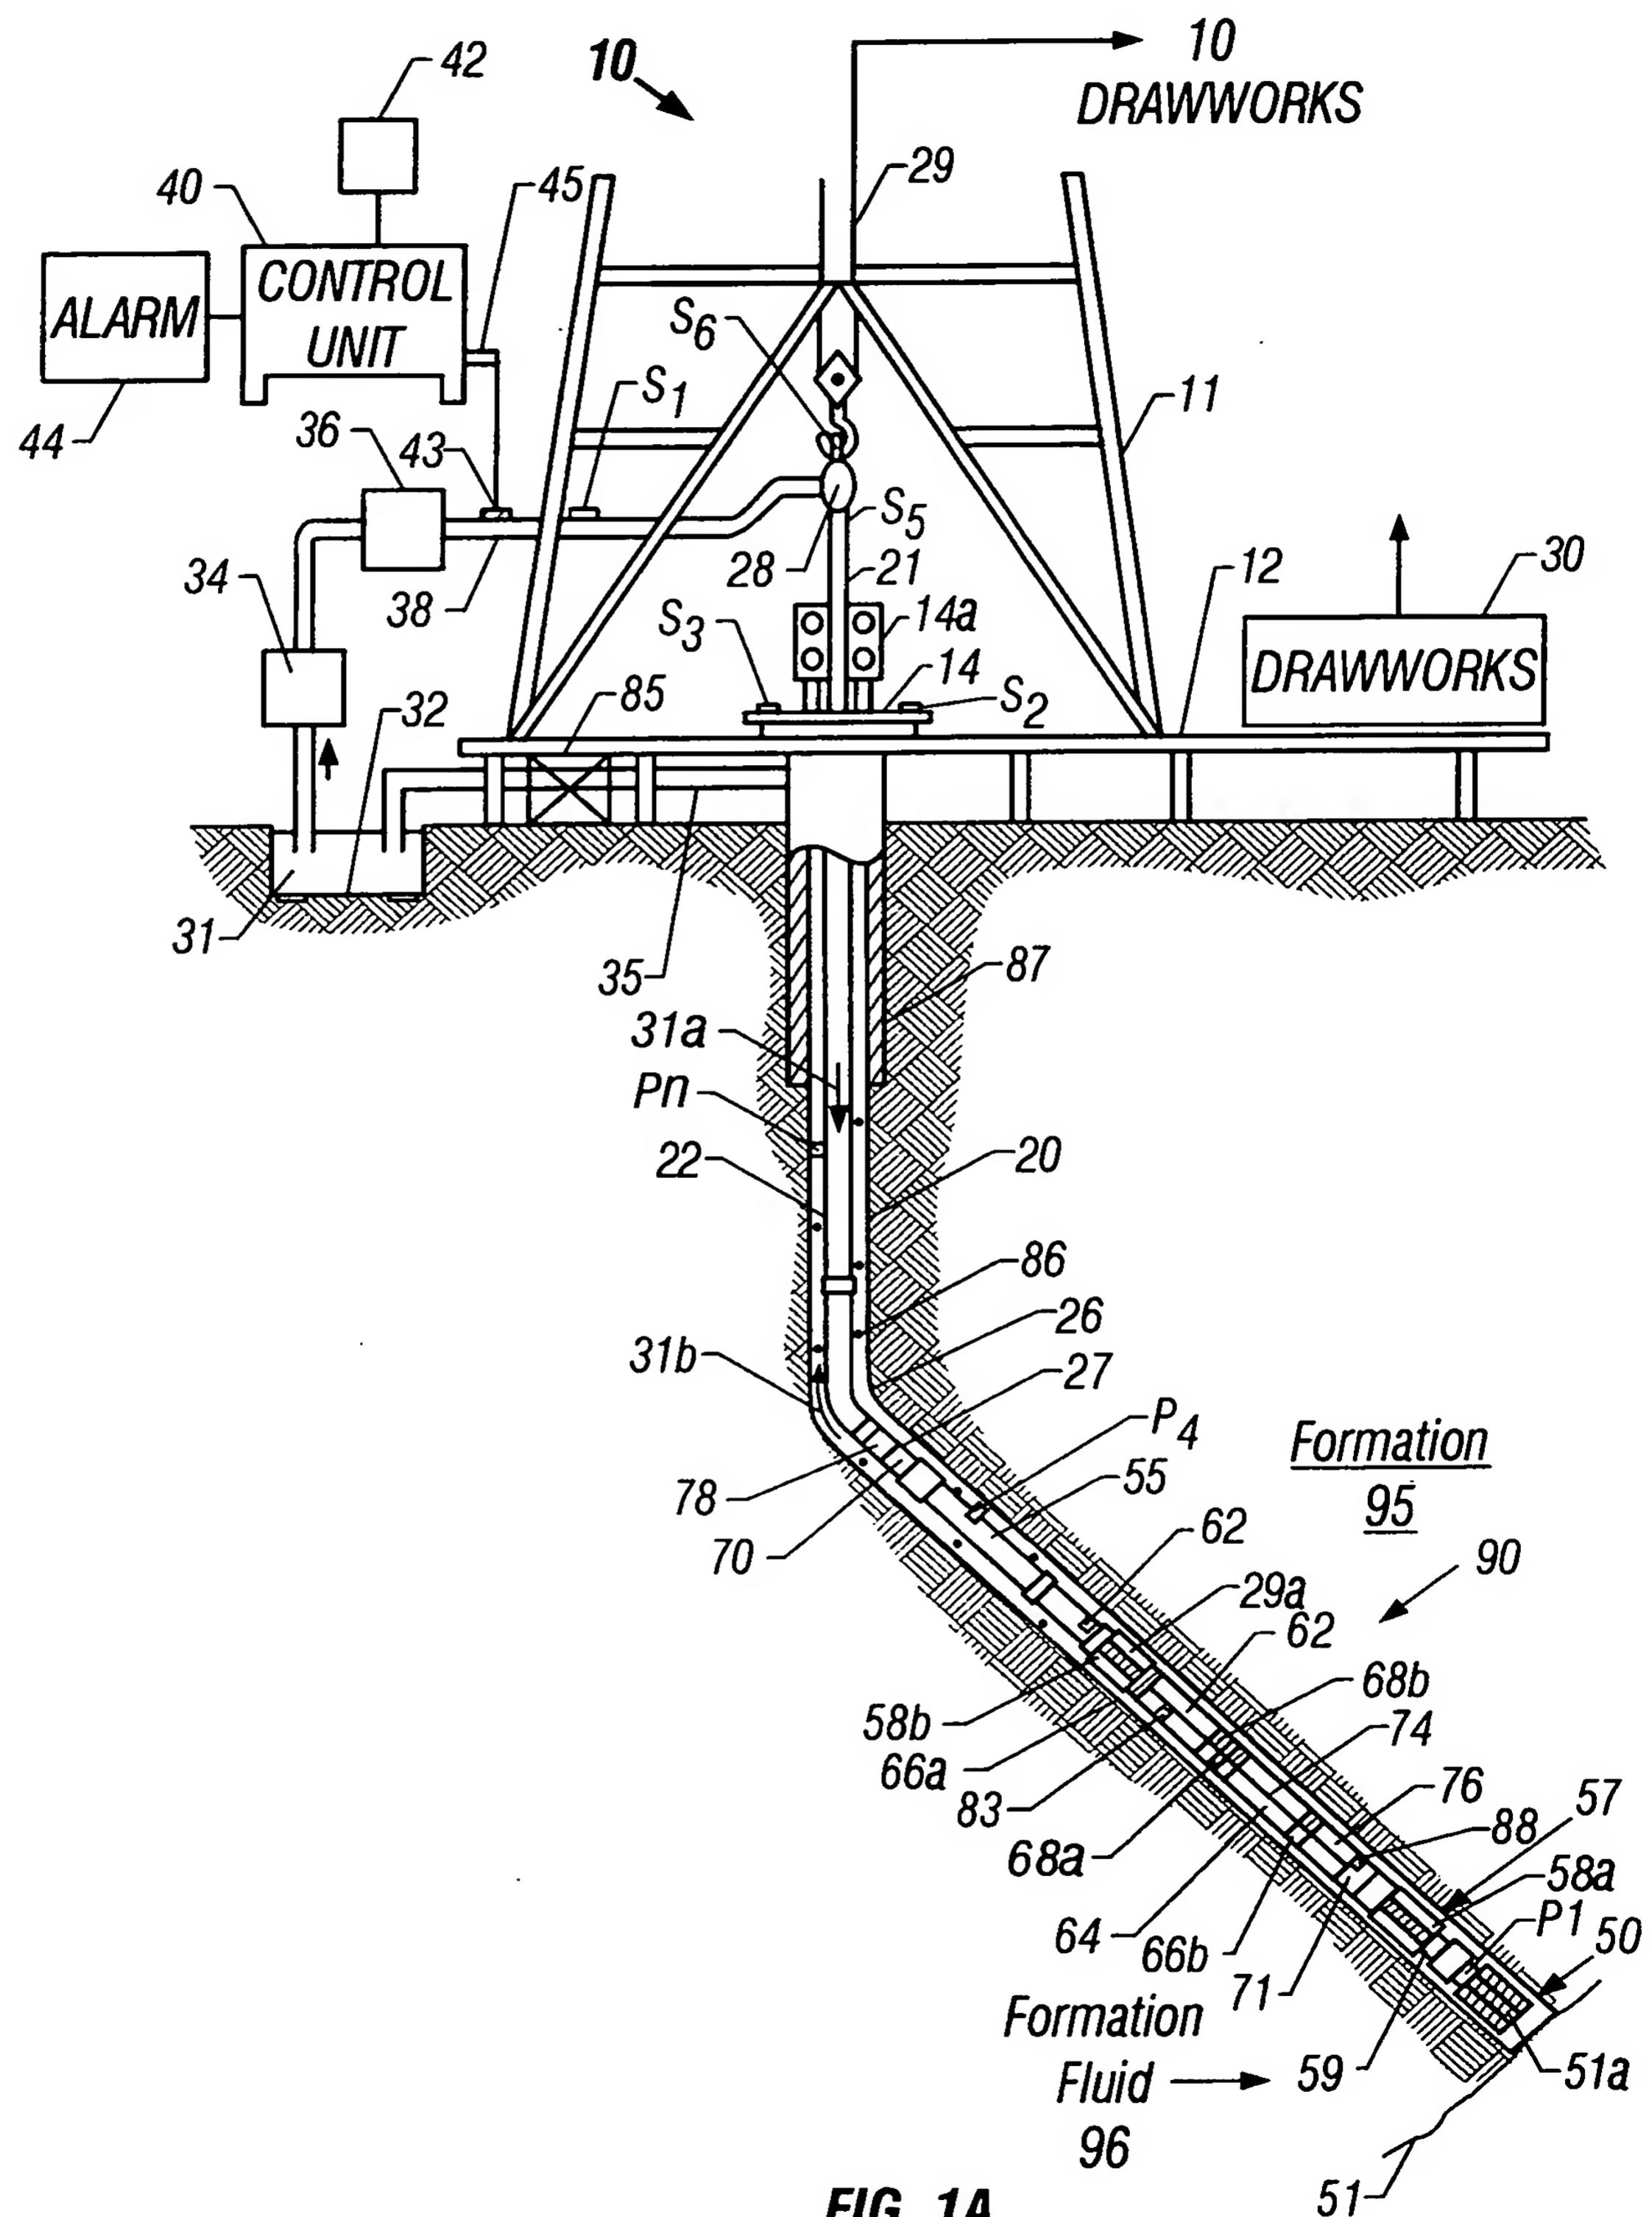


FIG. 1A

2/16

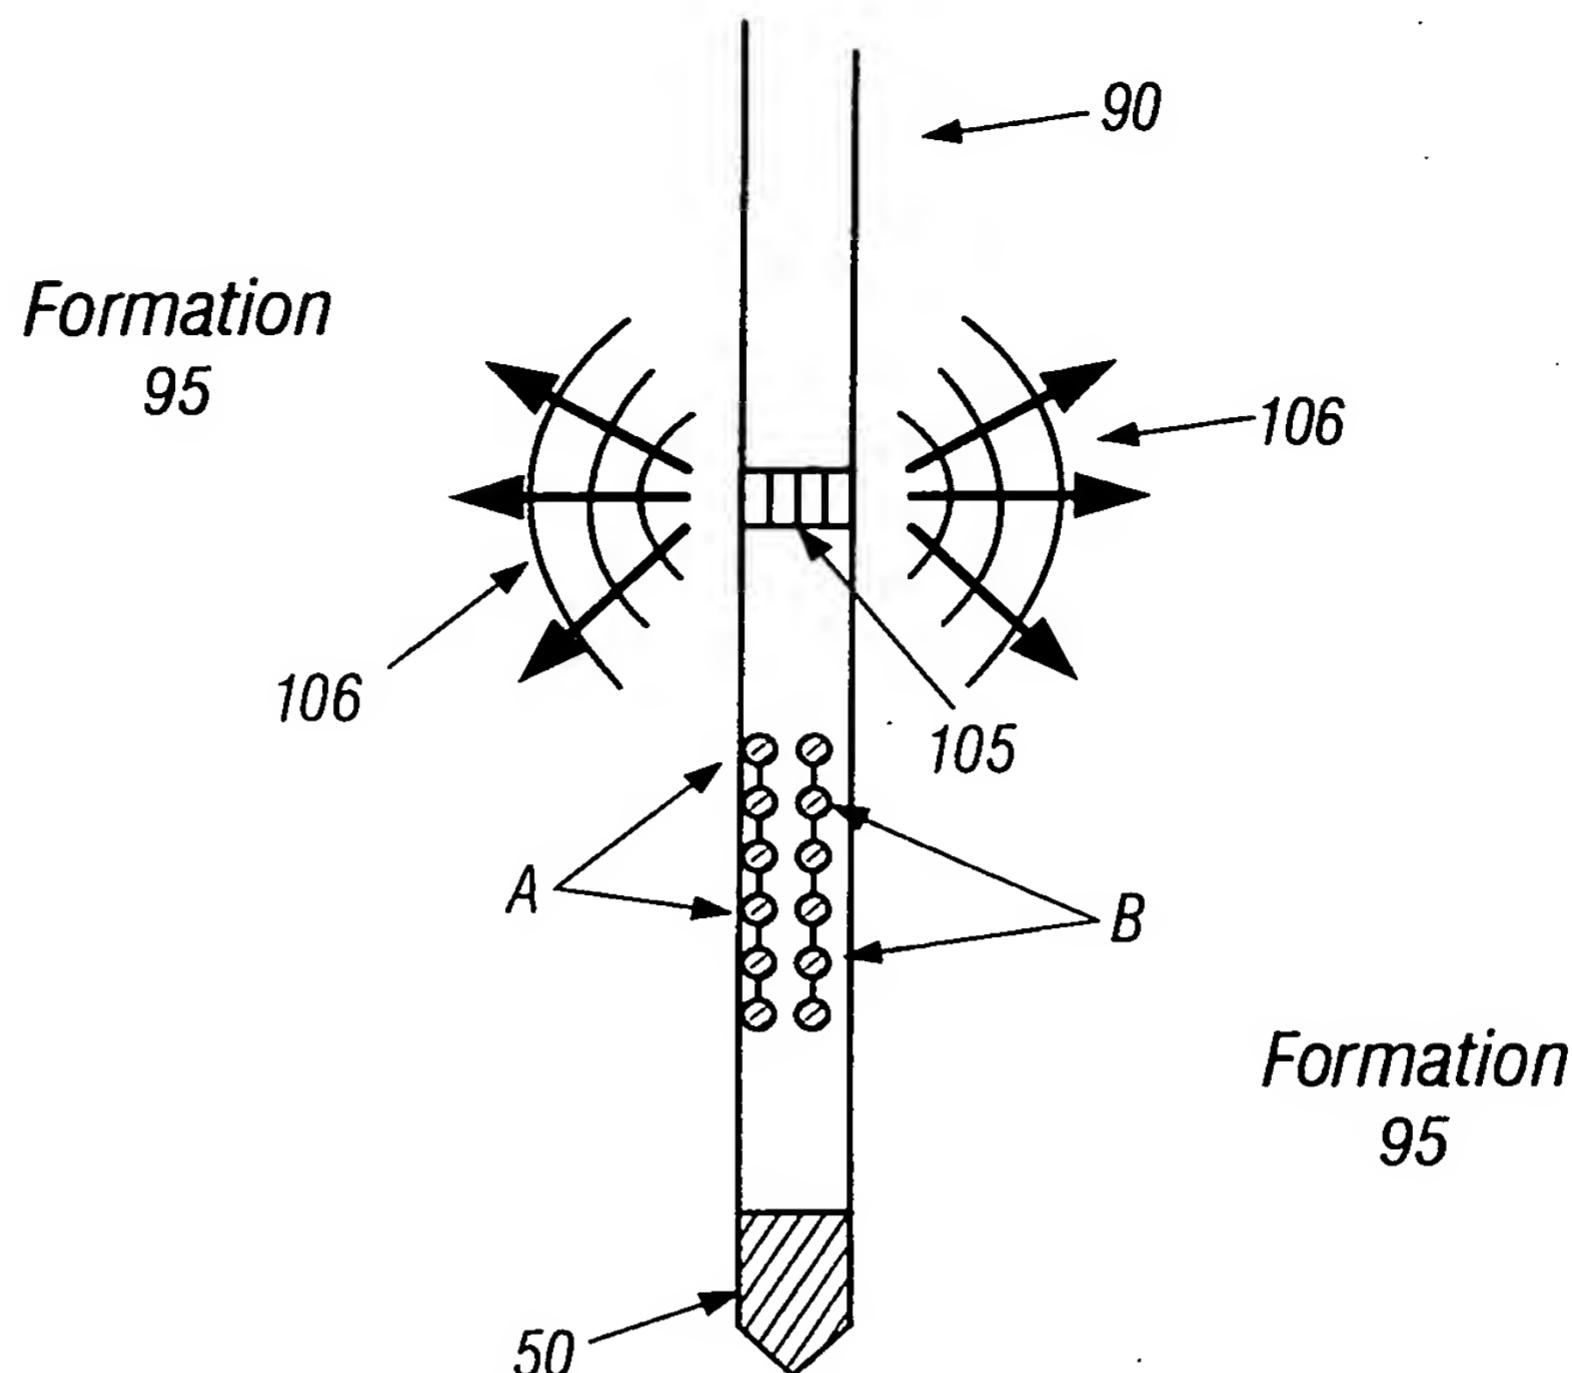


FIG. 1B

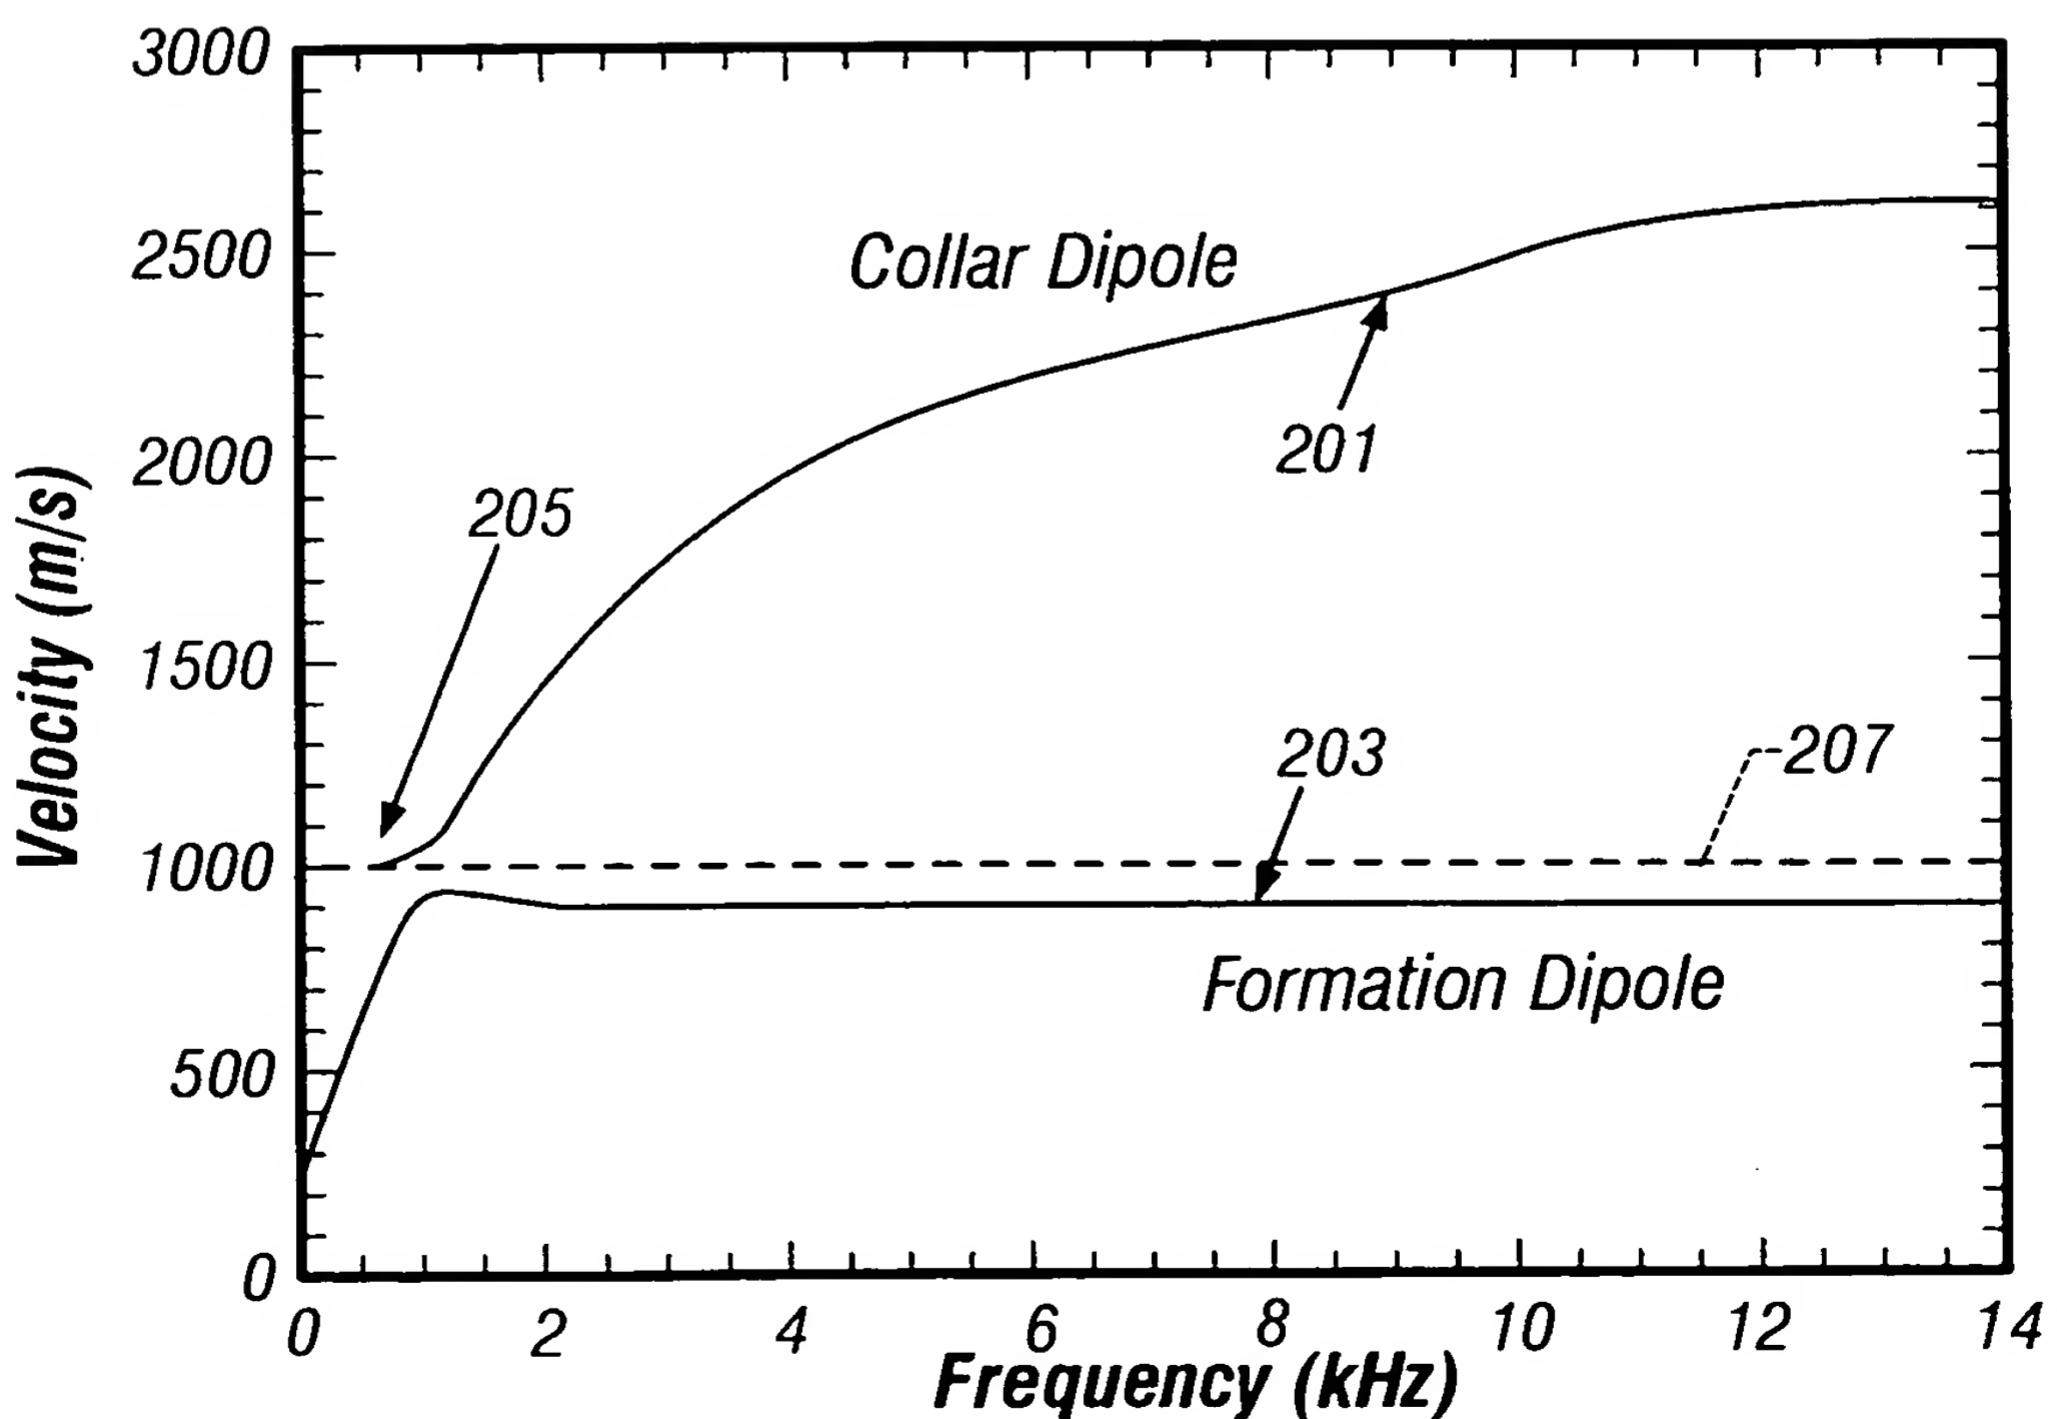


FIG. 2

3/16

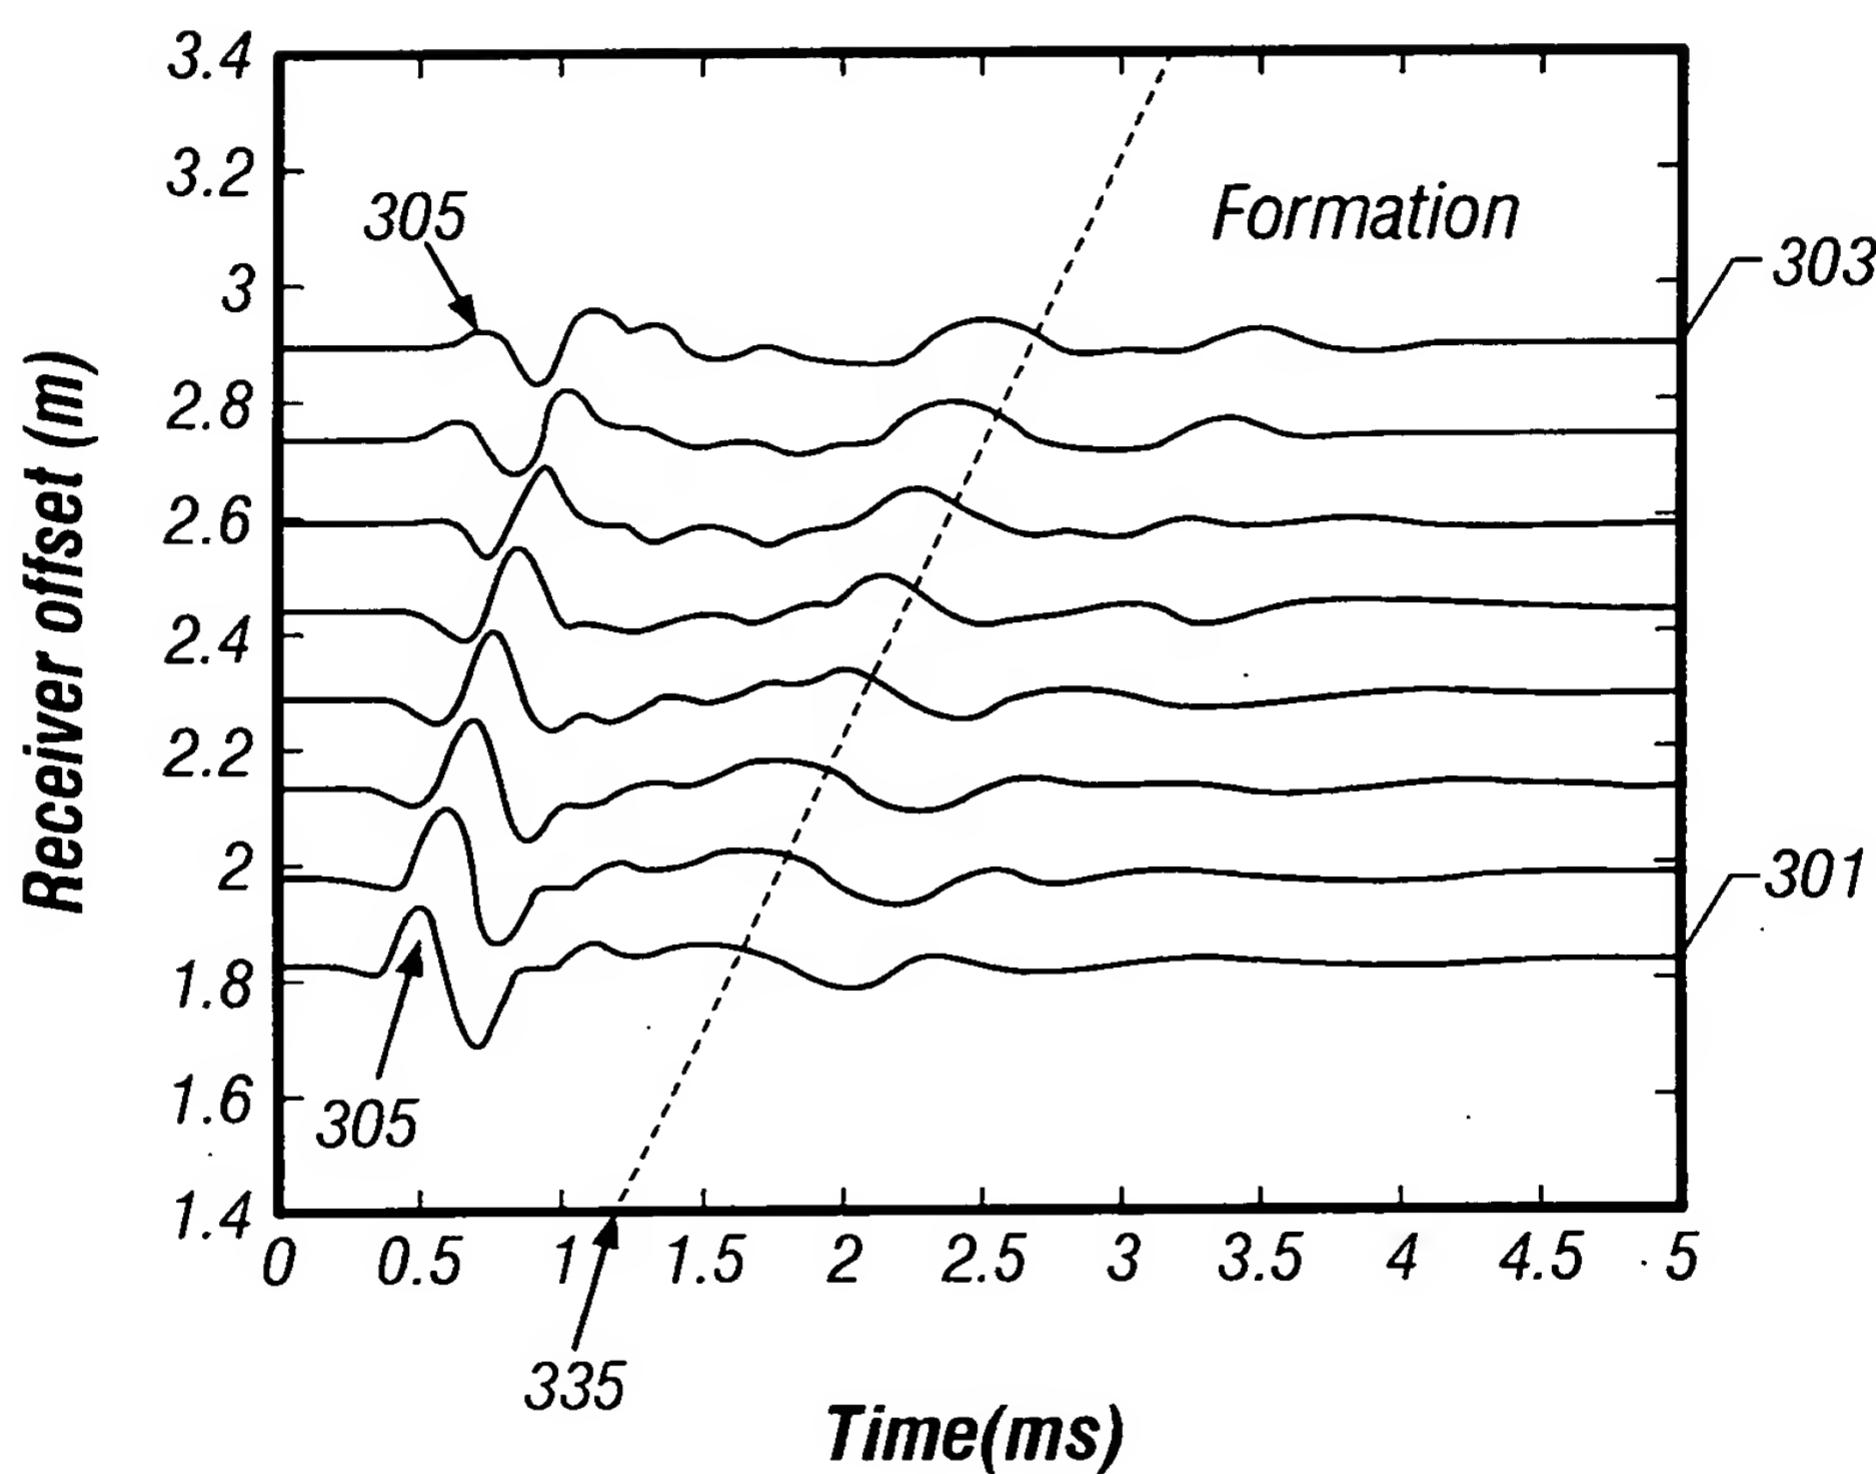


FIG. 3

4/16

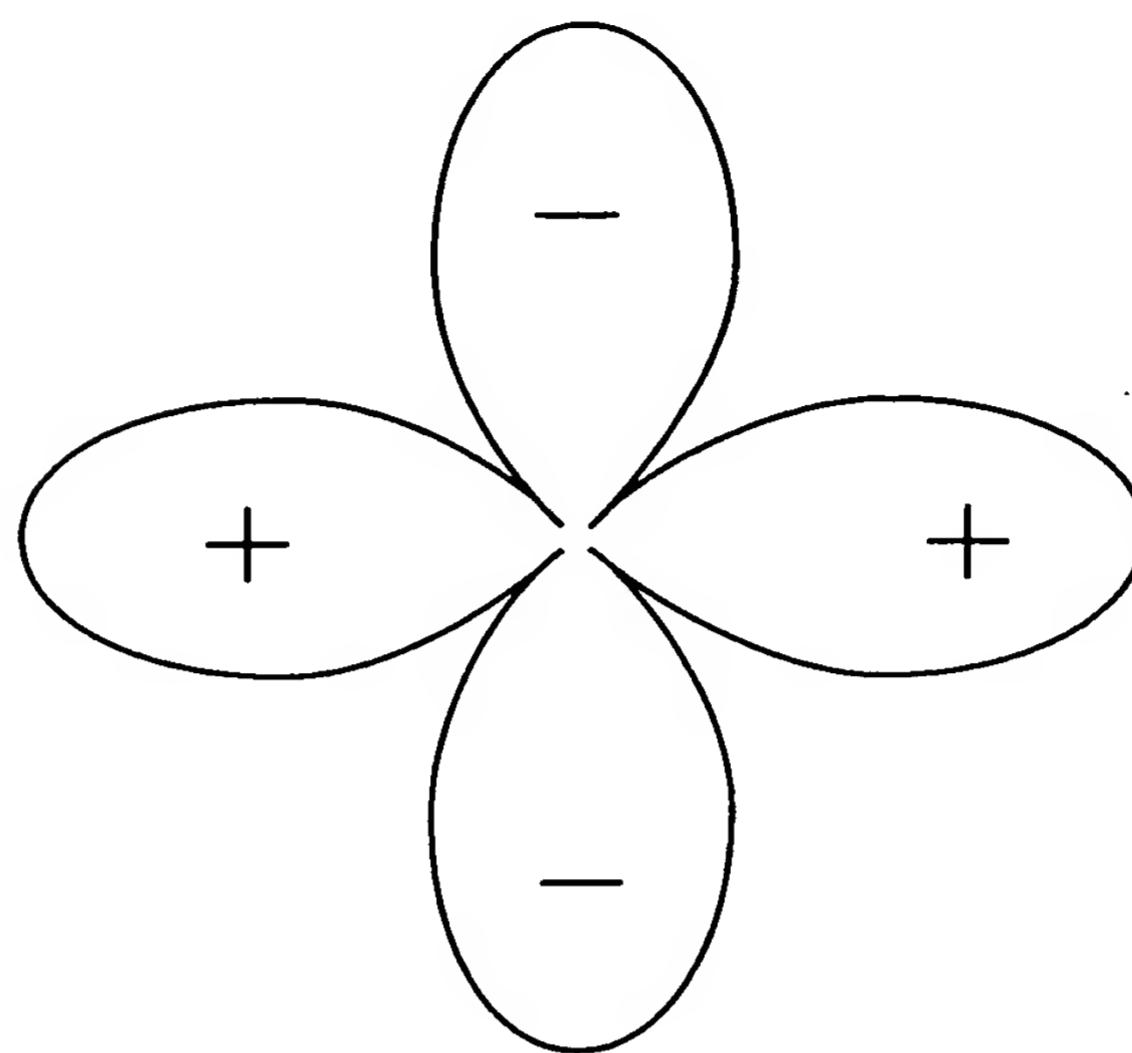


FIG. 4A

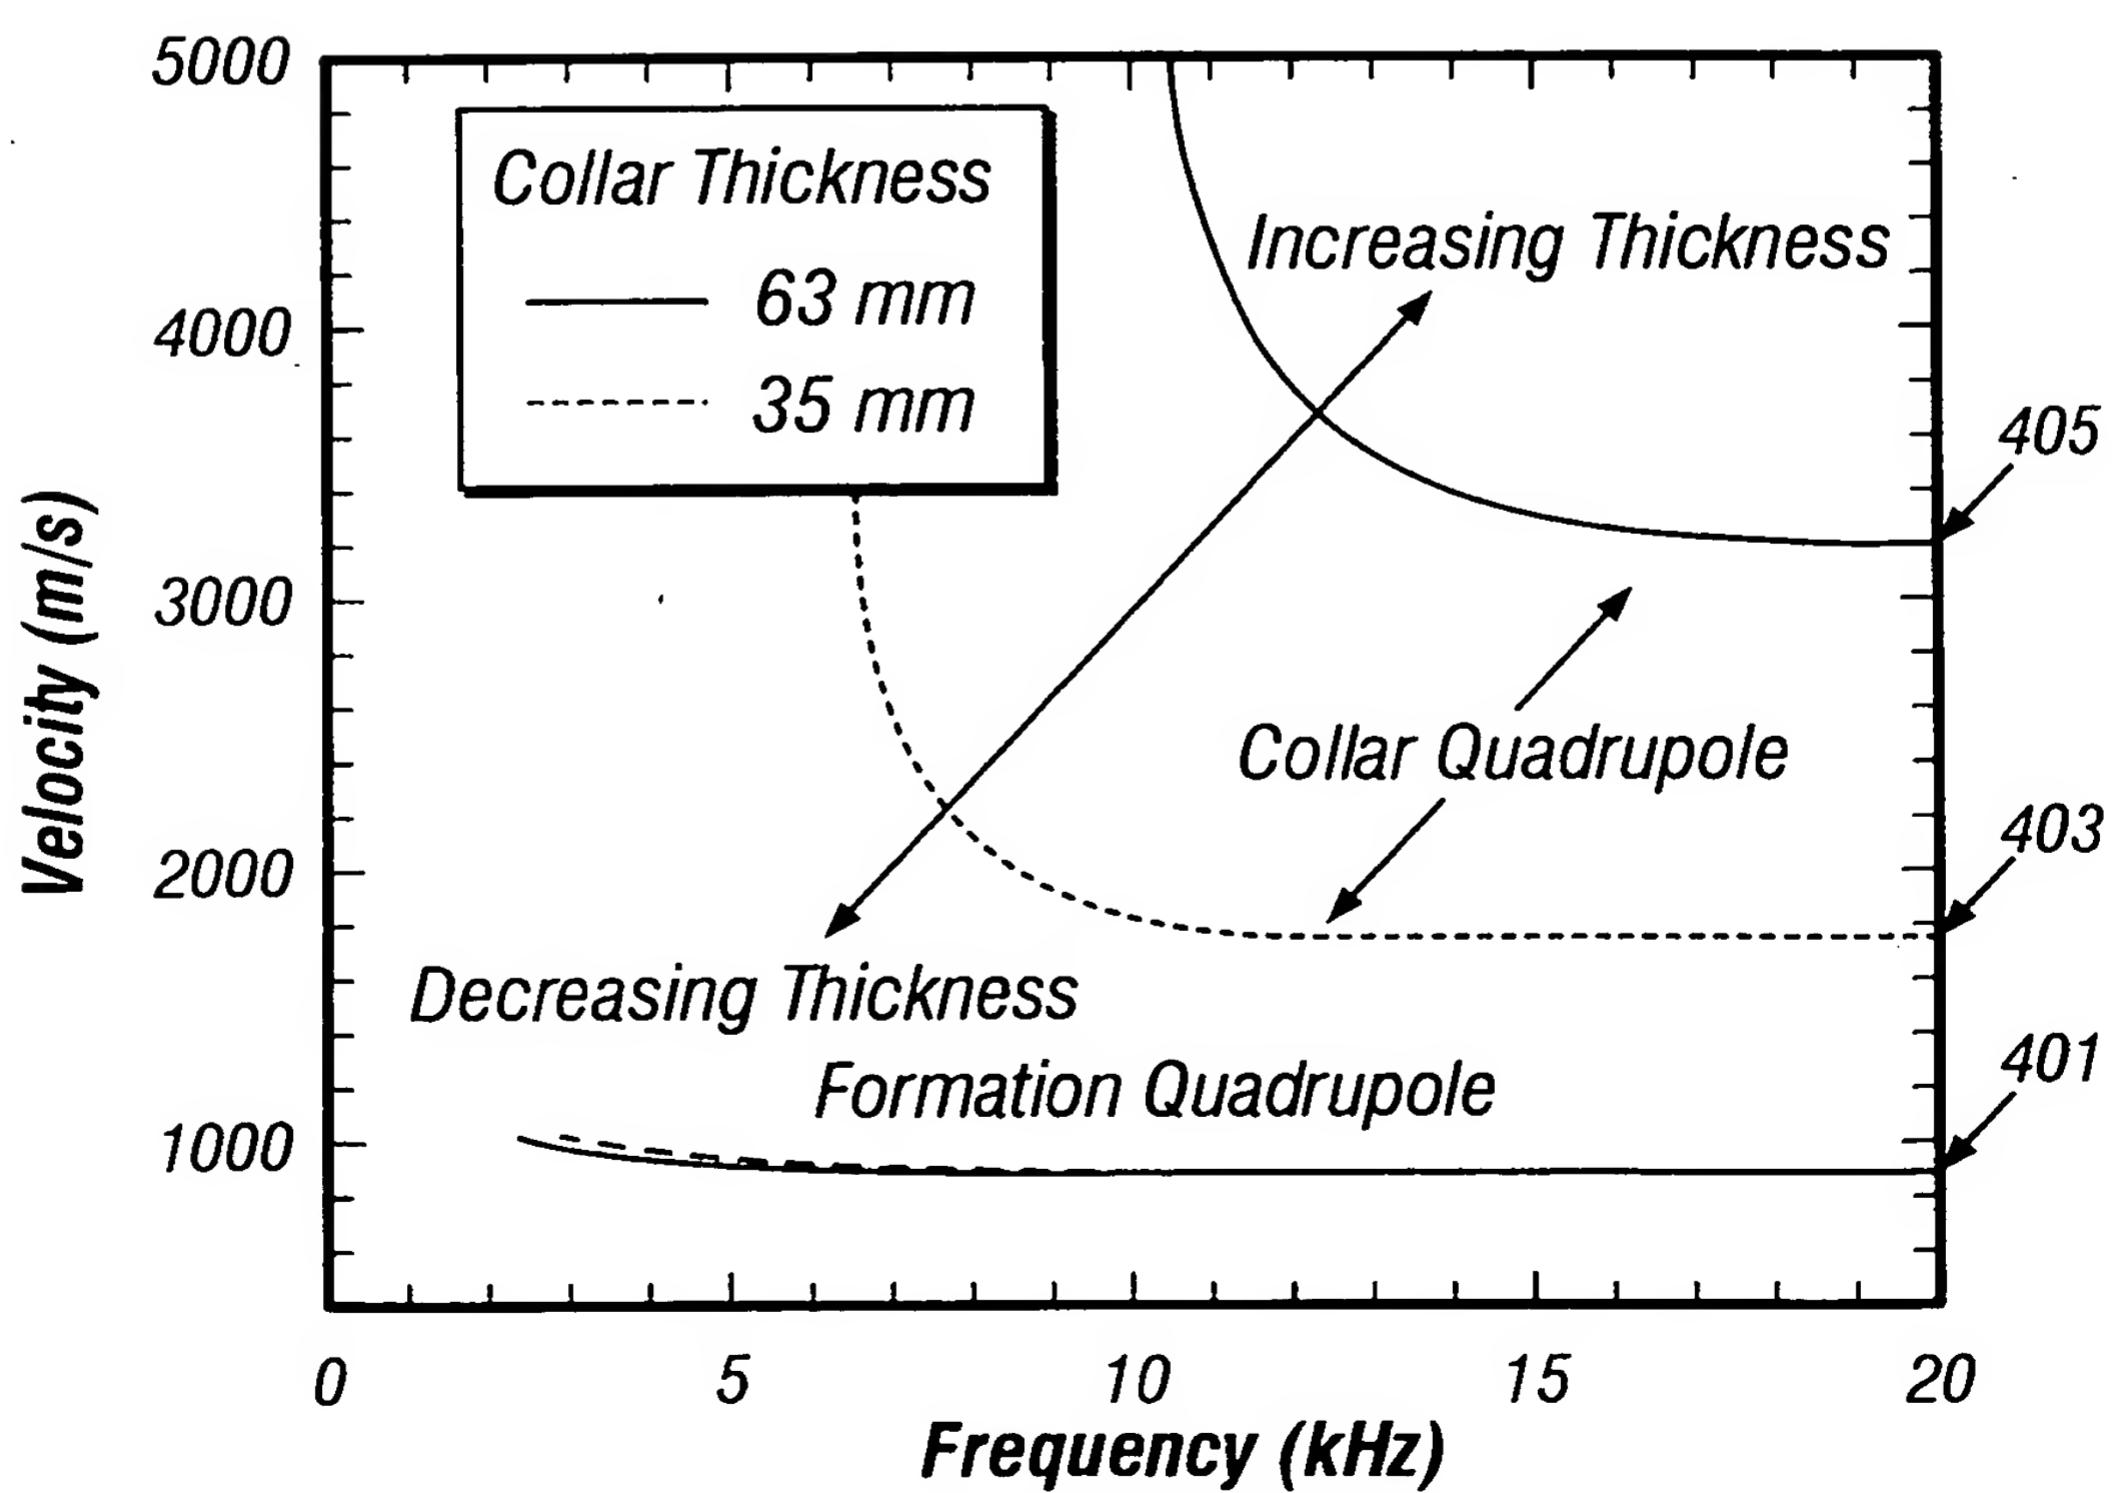


FIG. 4B

5/16

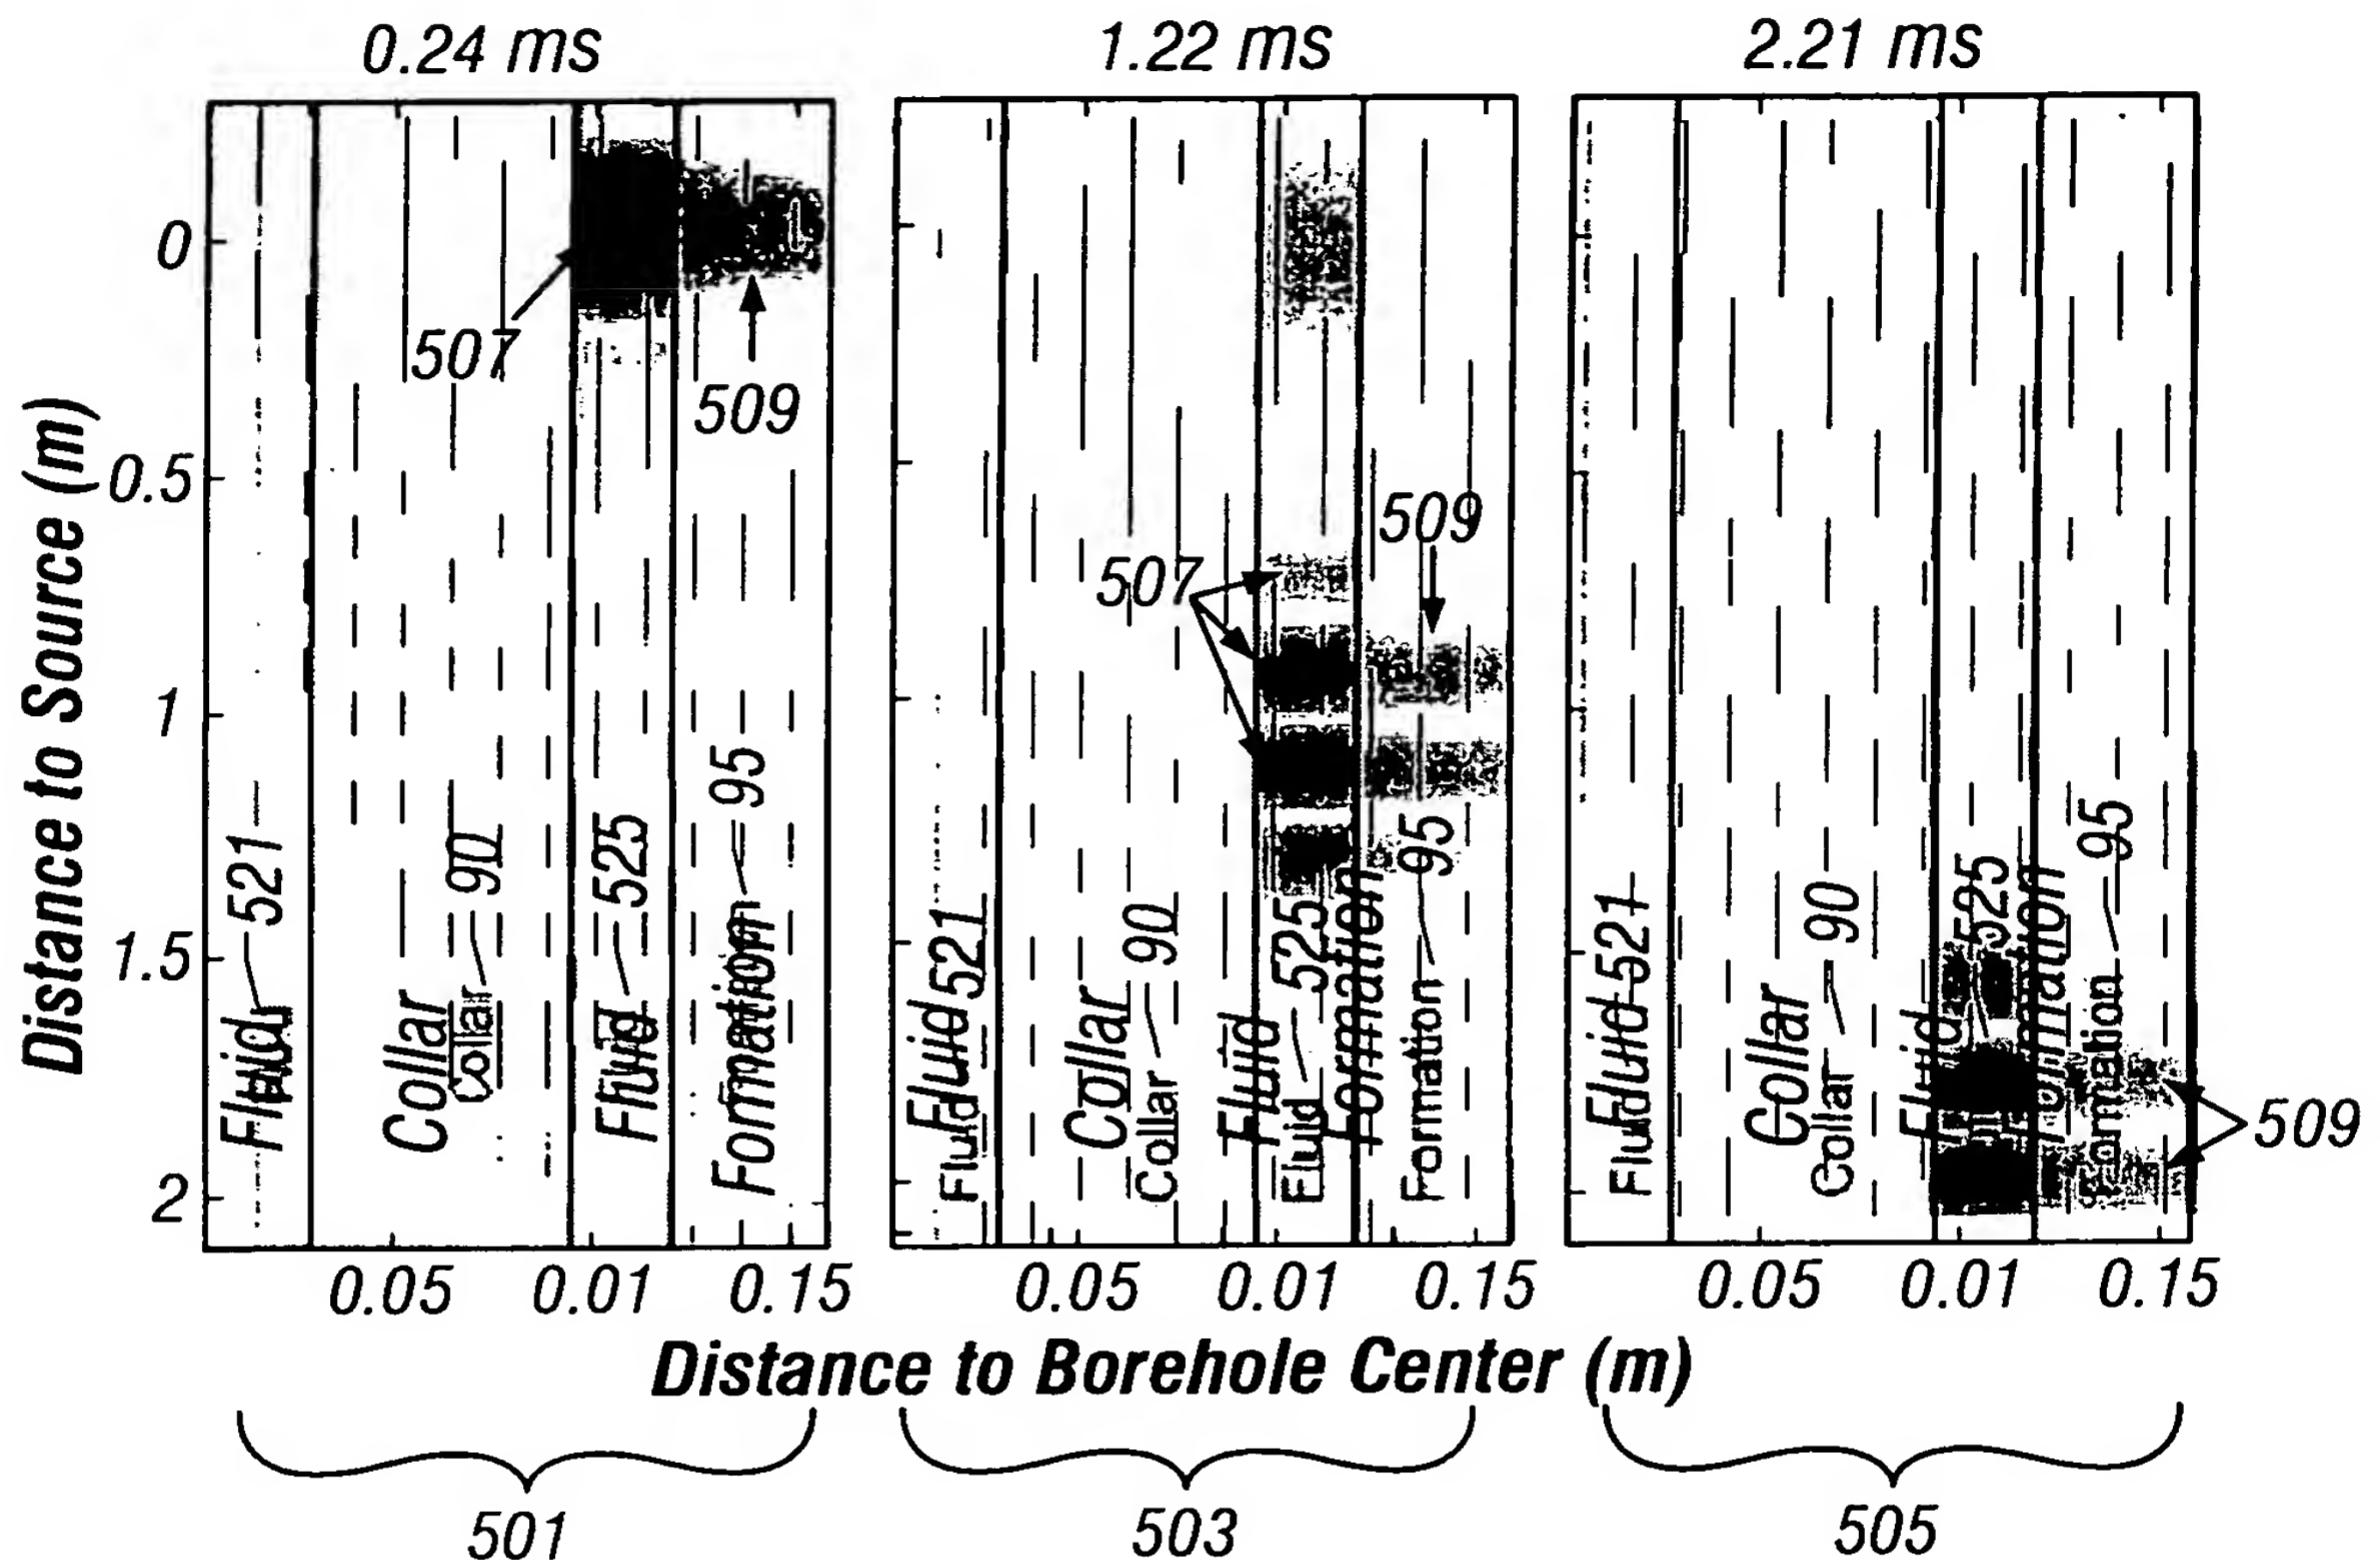


FIG. 5A

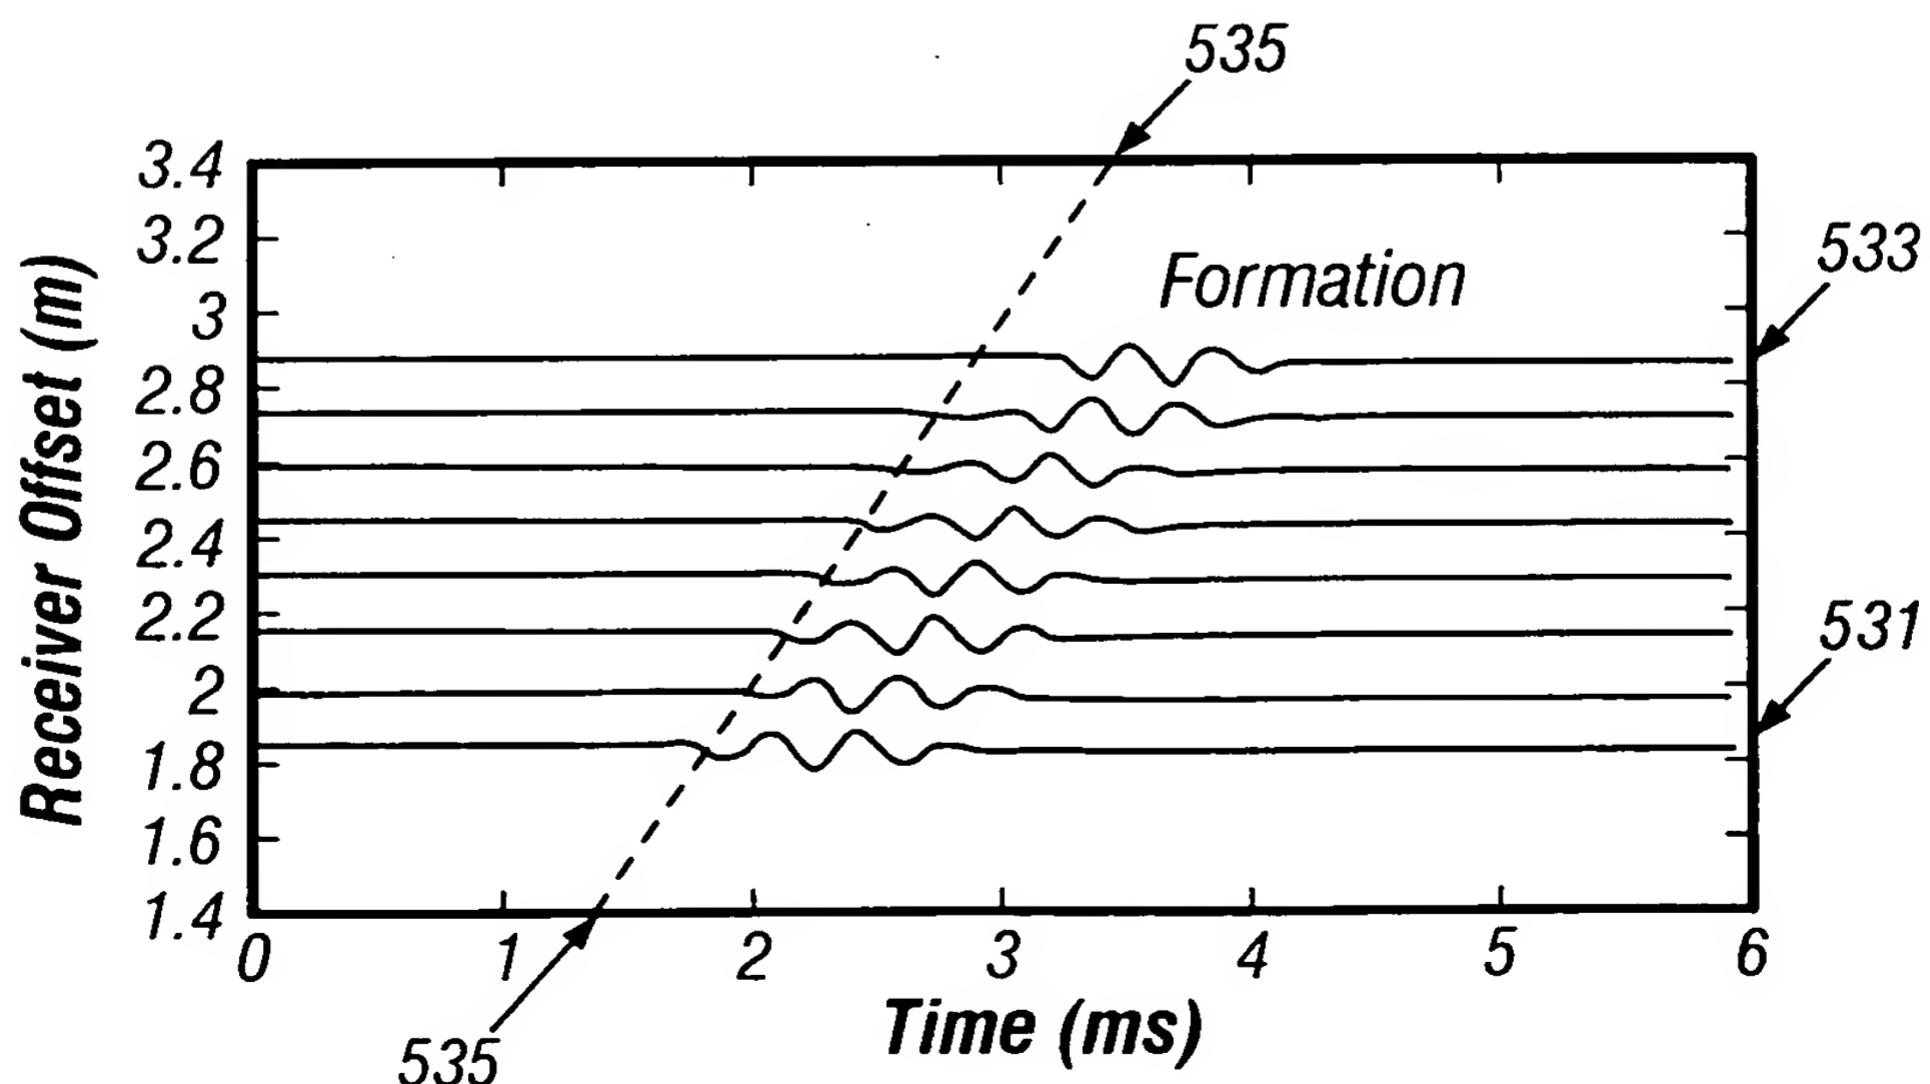


FIG. 5B

6/16

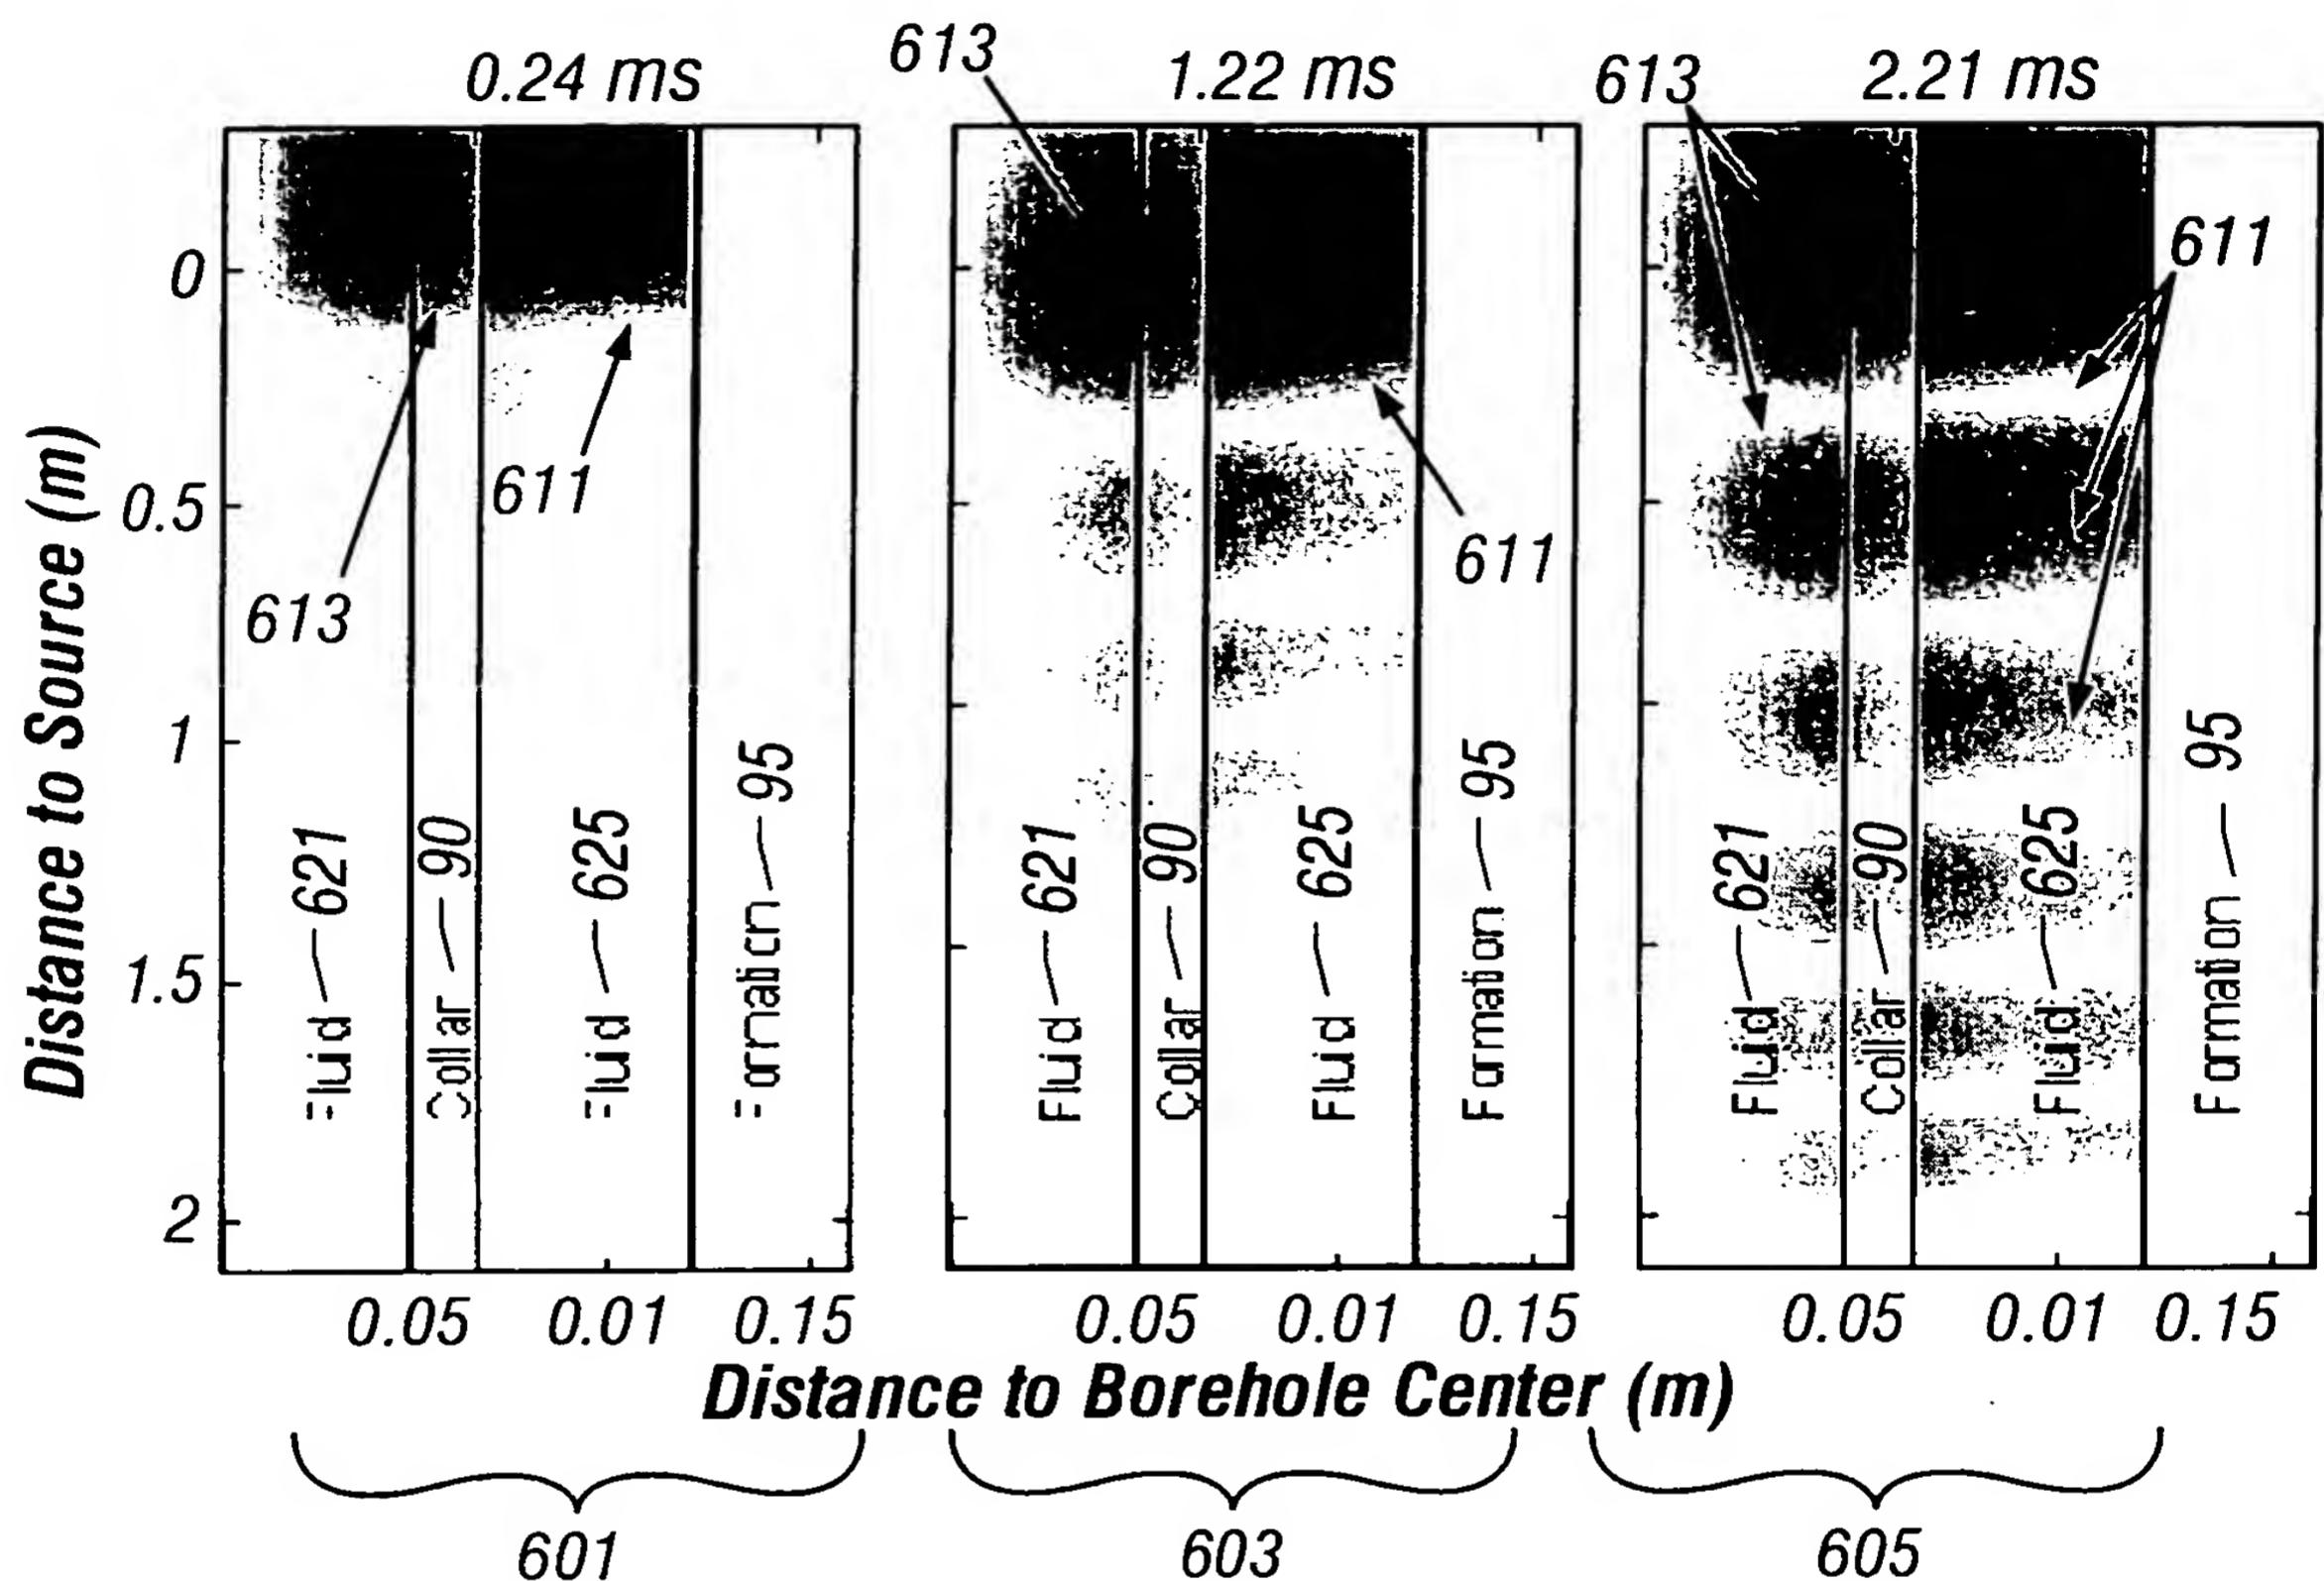


FIG. 6A

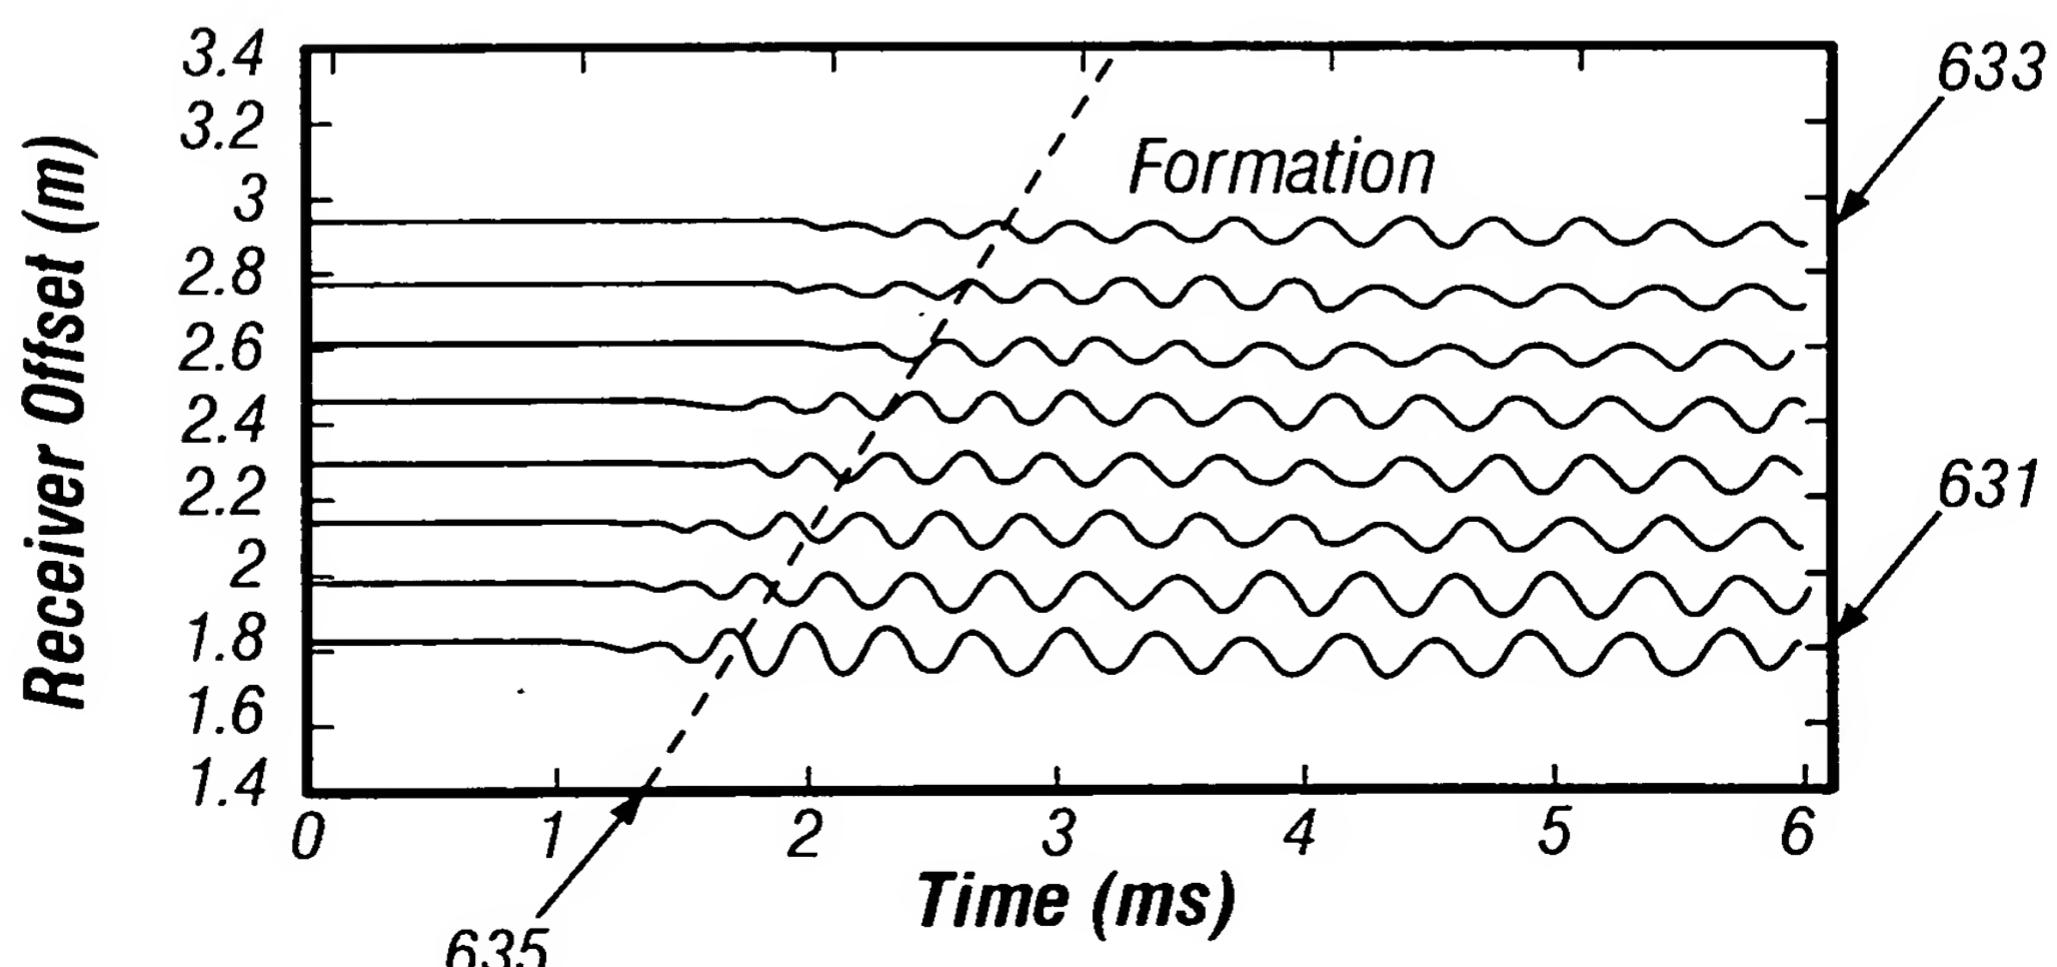


FIG. 6B

7/16

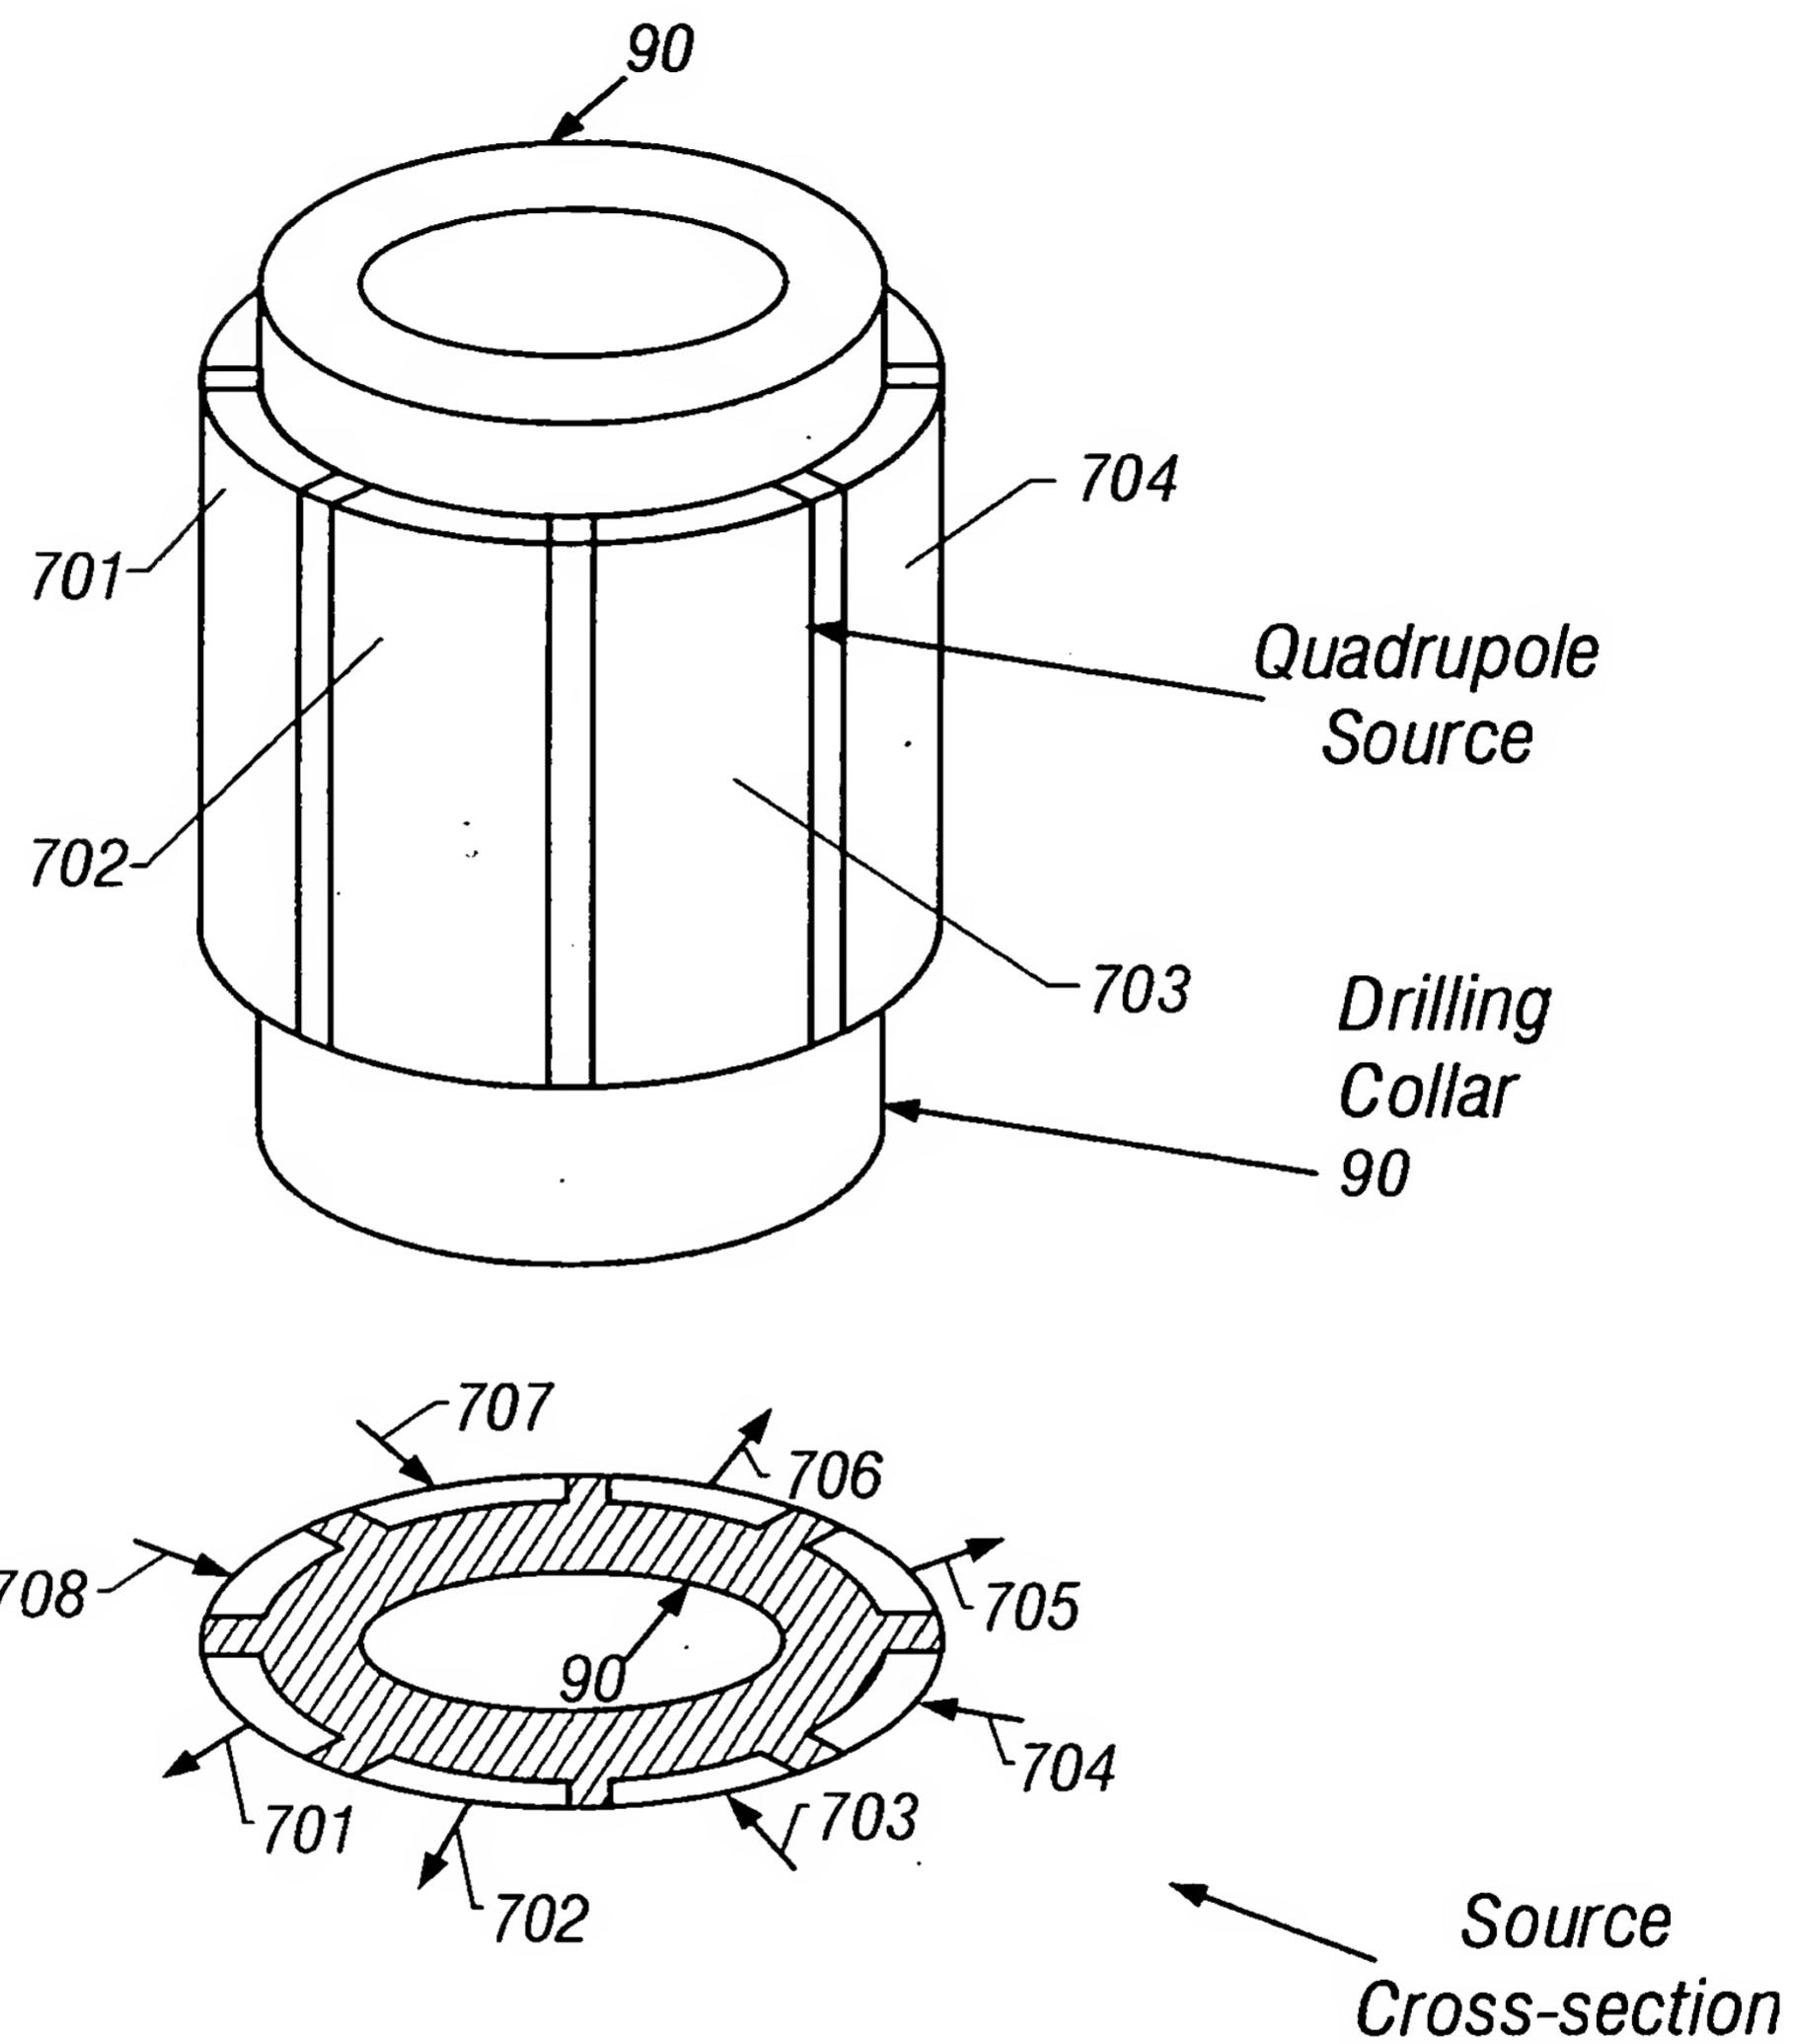


FIG. 7

8/16

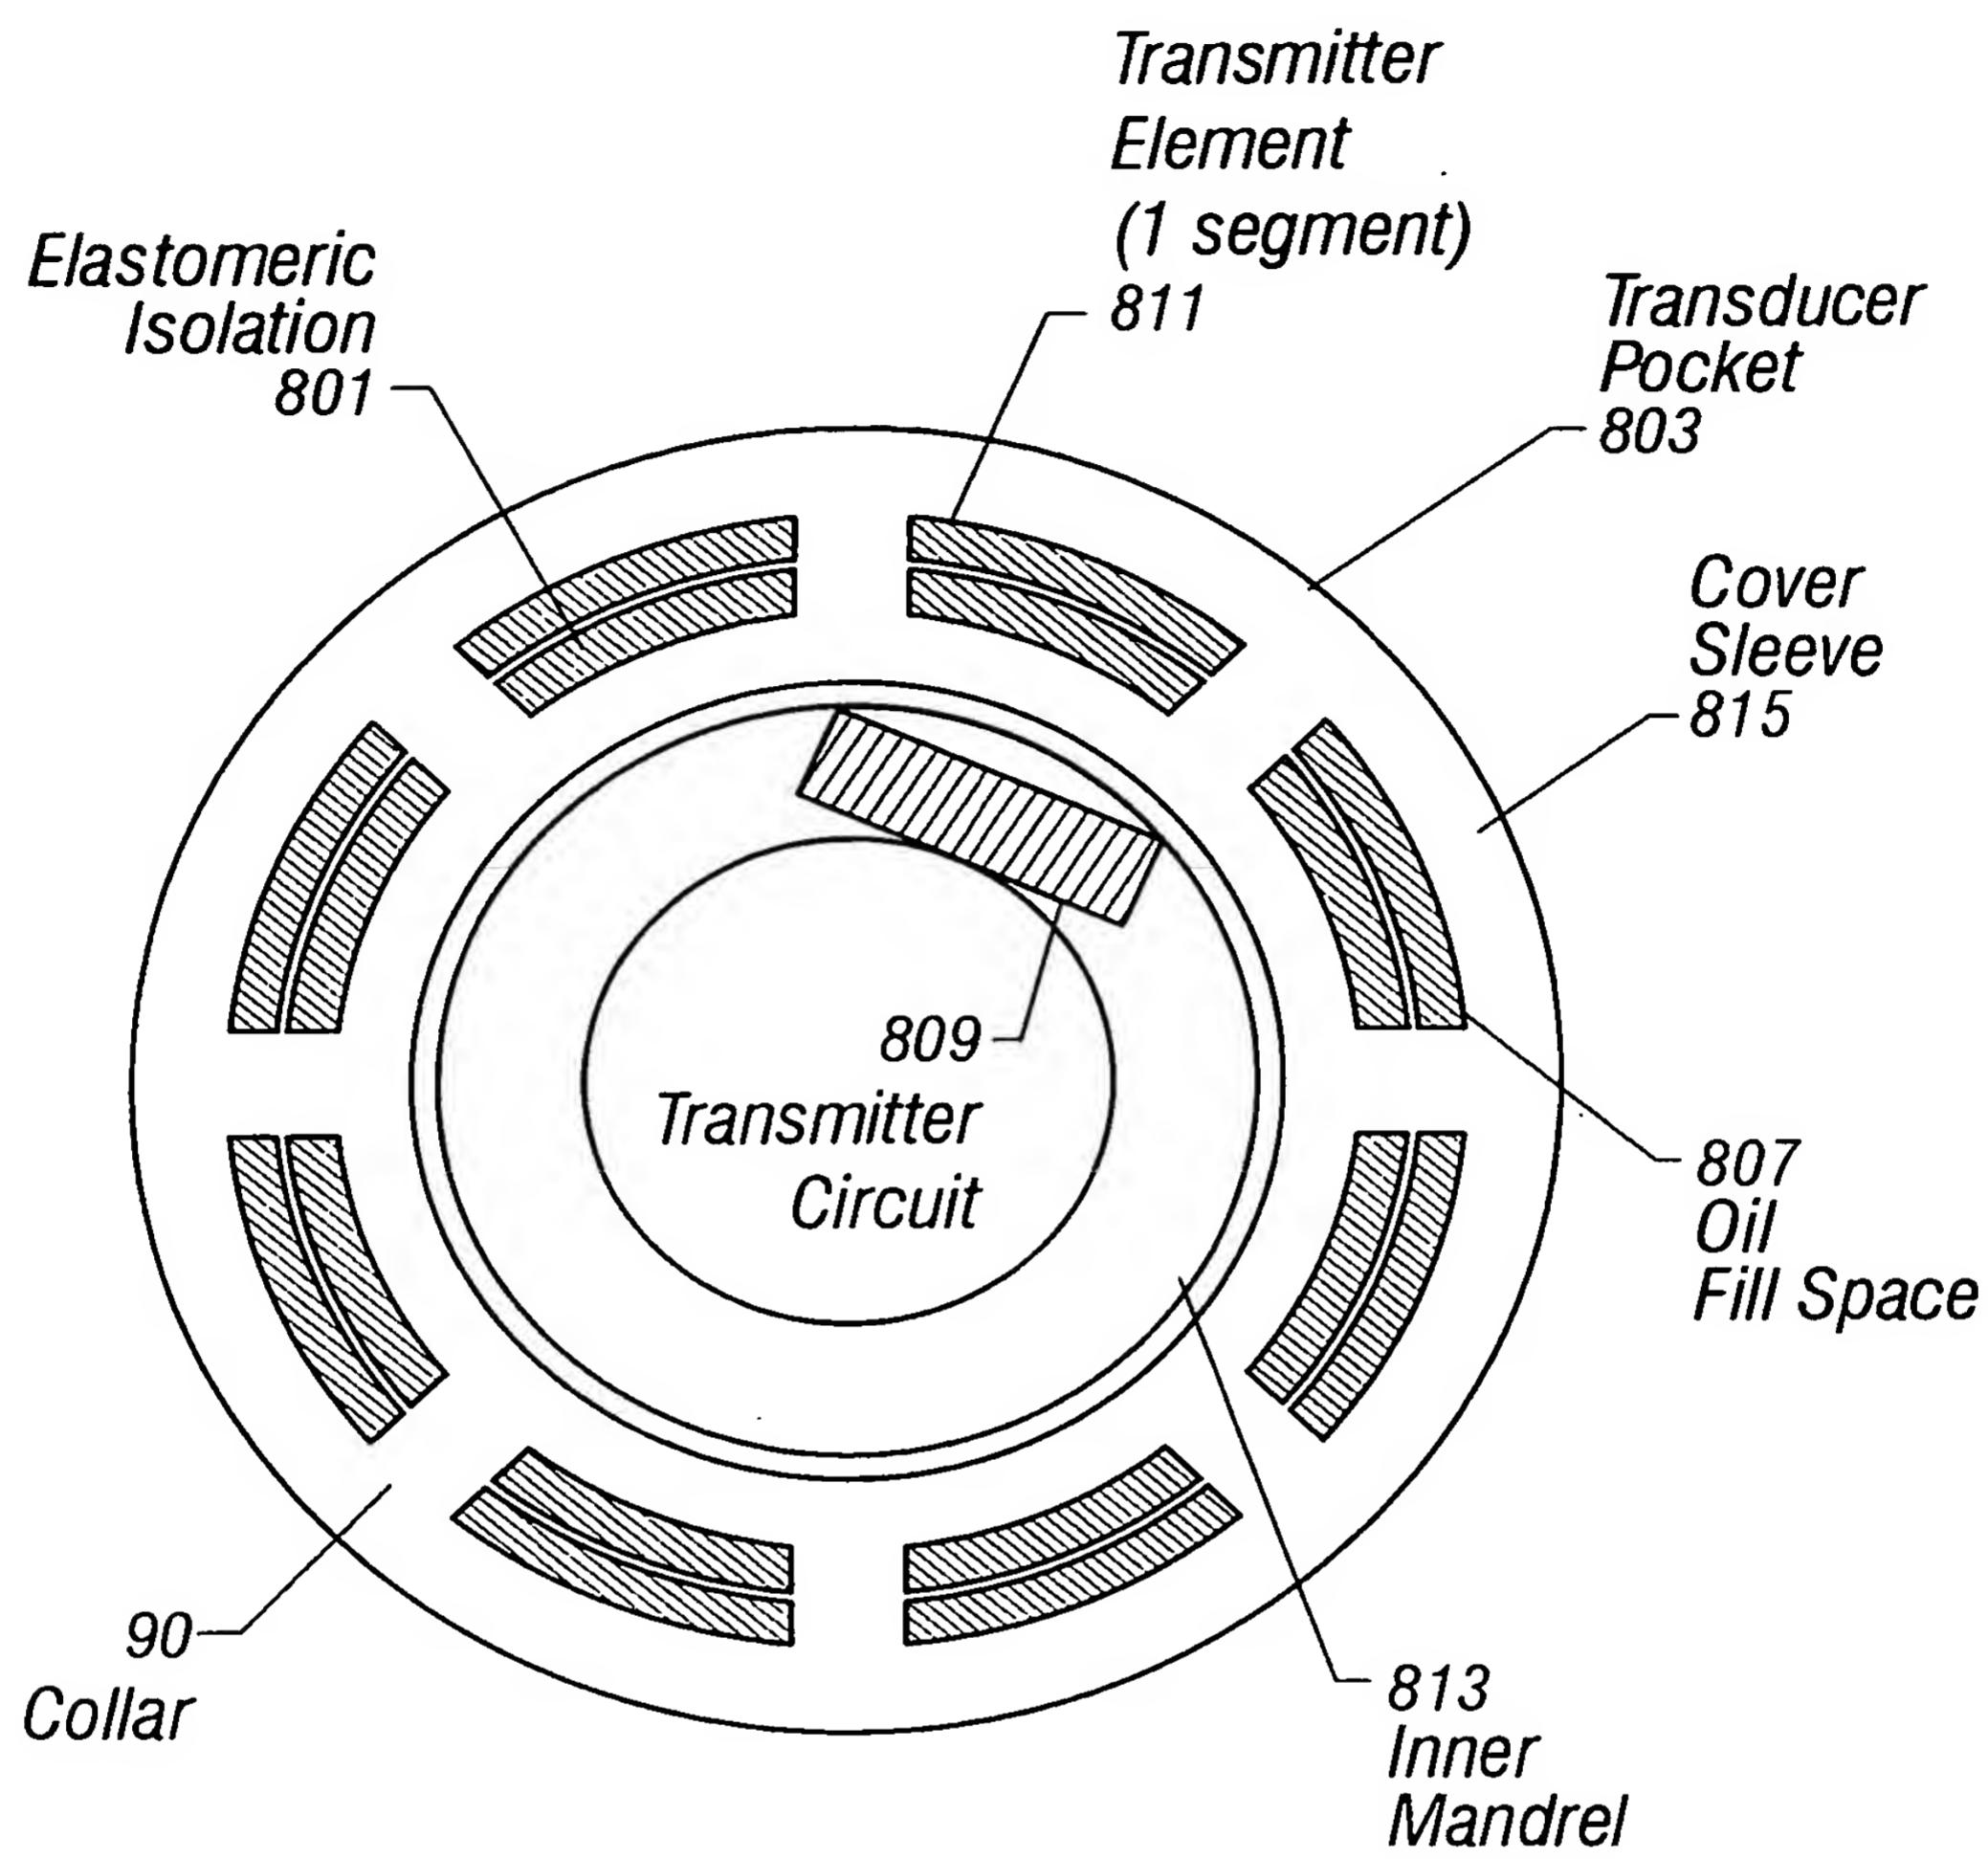


FIG. 8

9/16

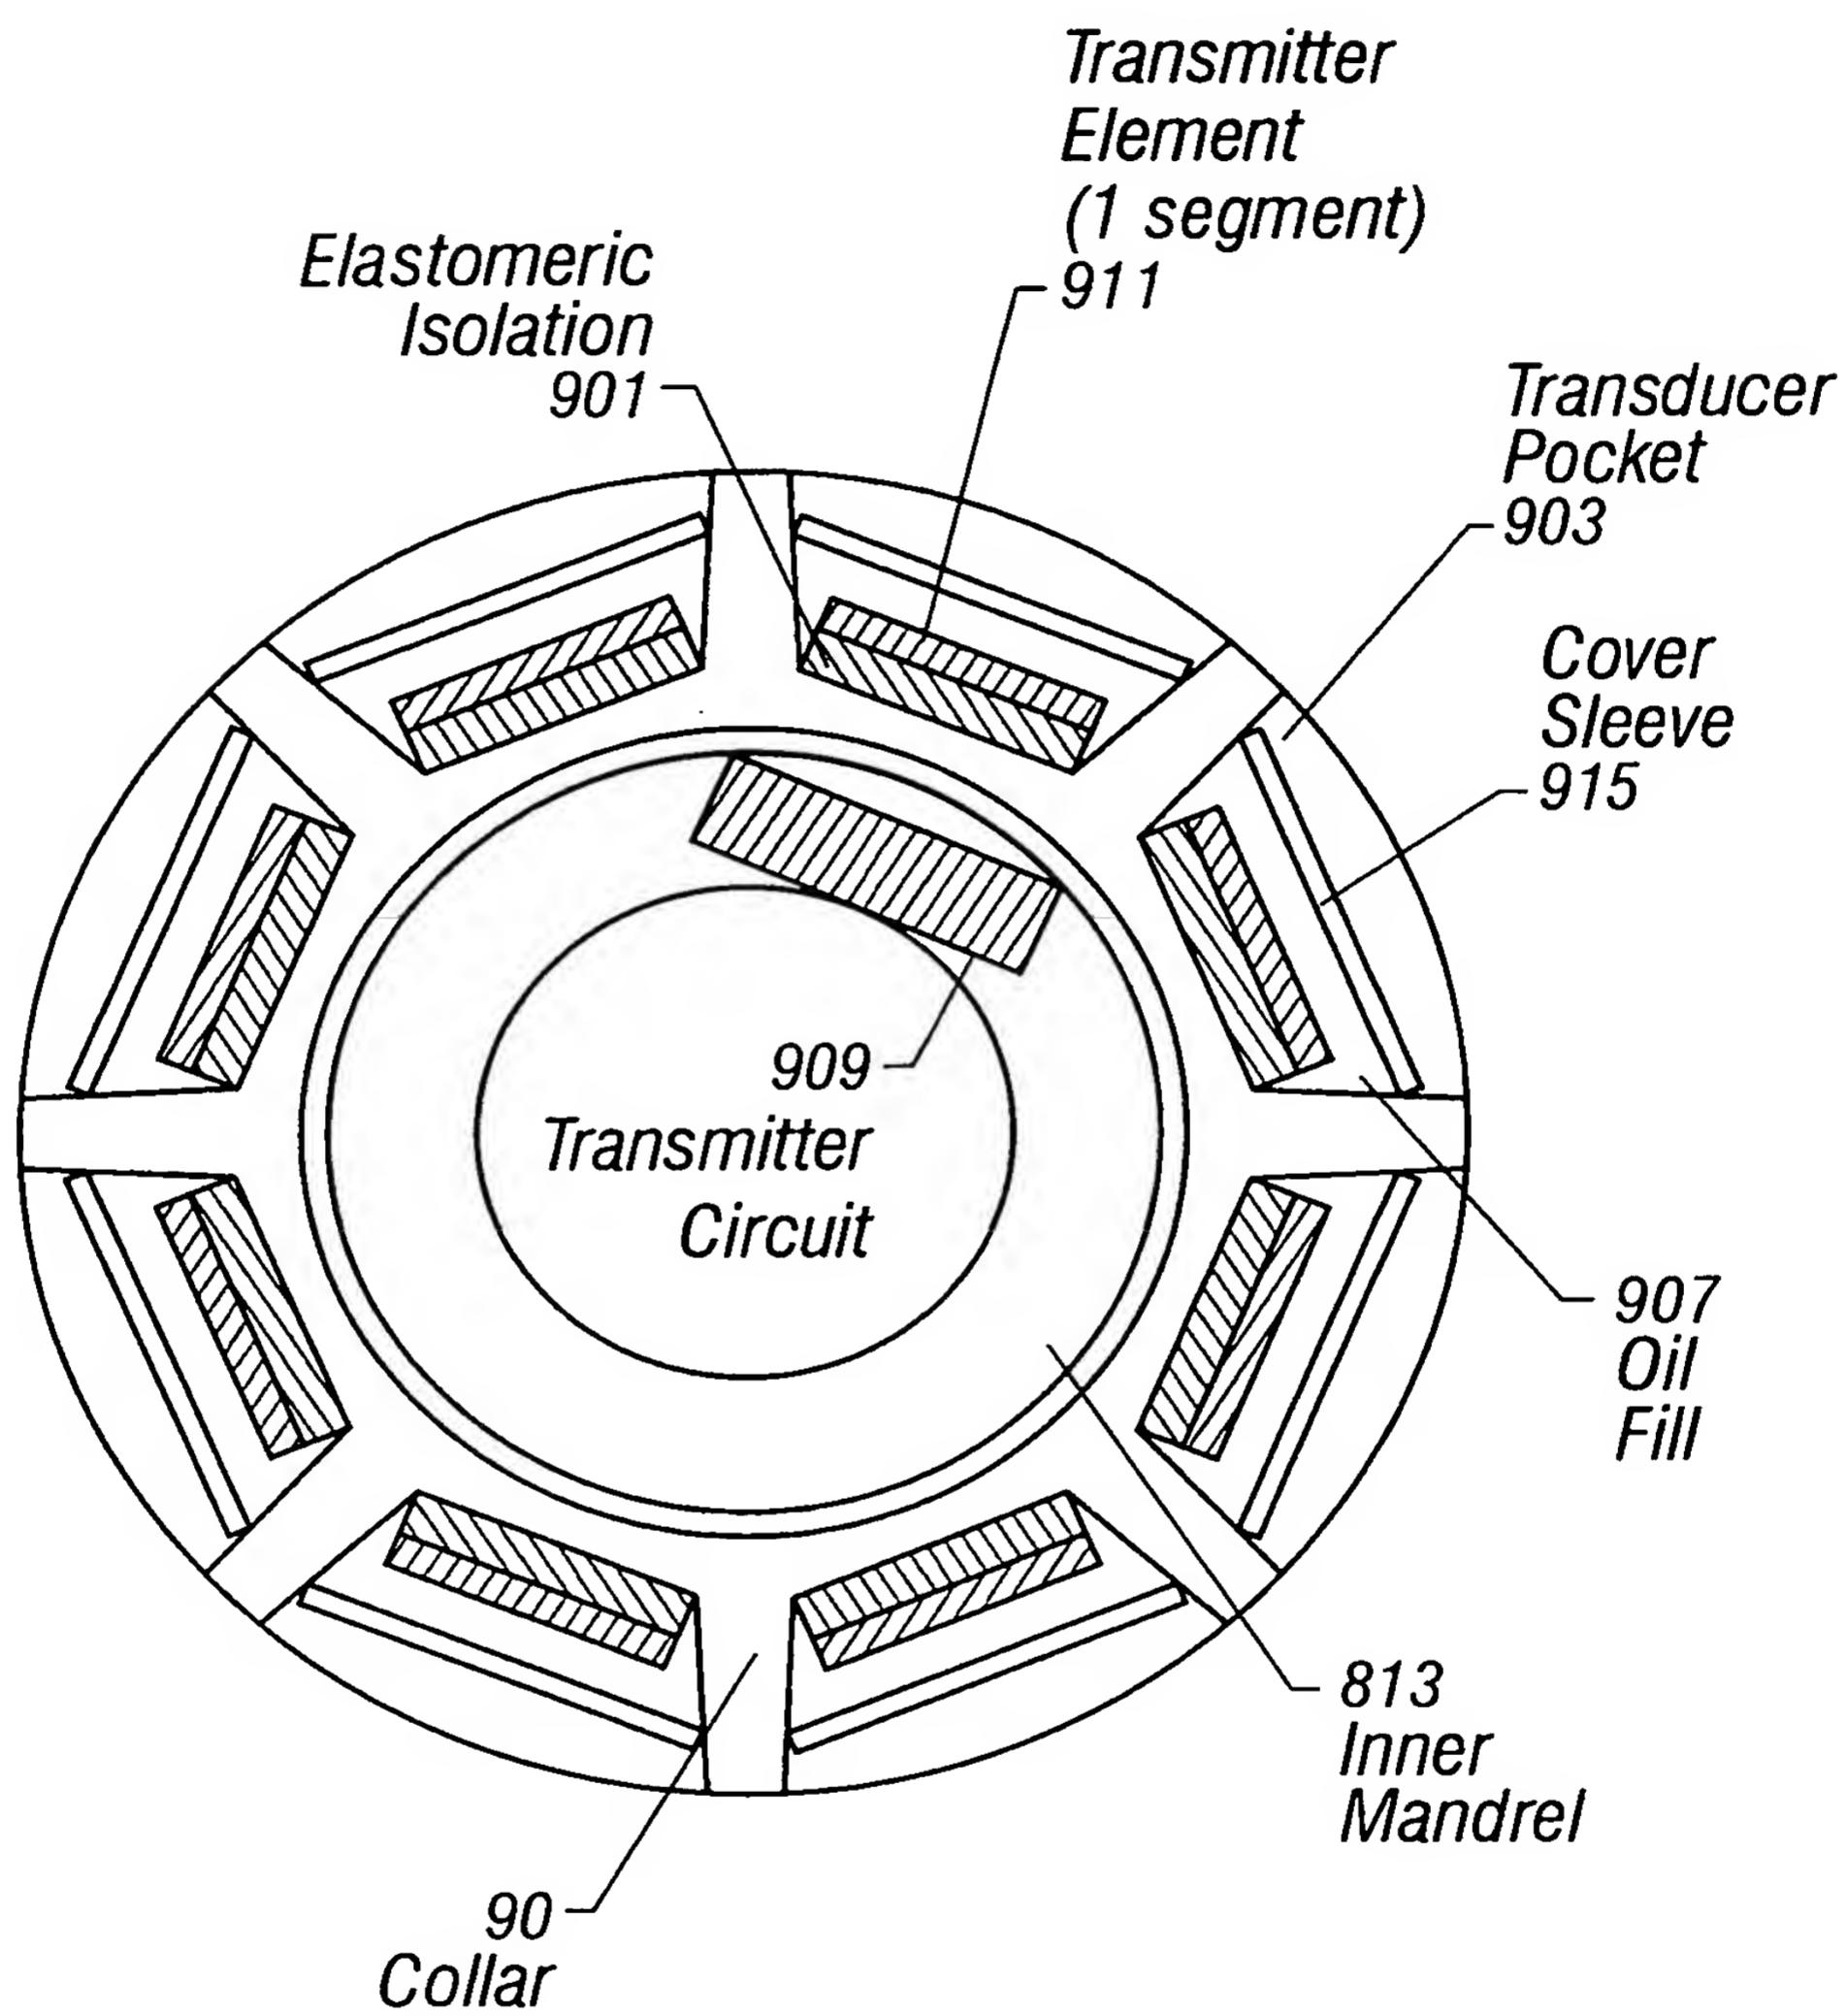


FIG. 9

10/16

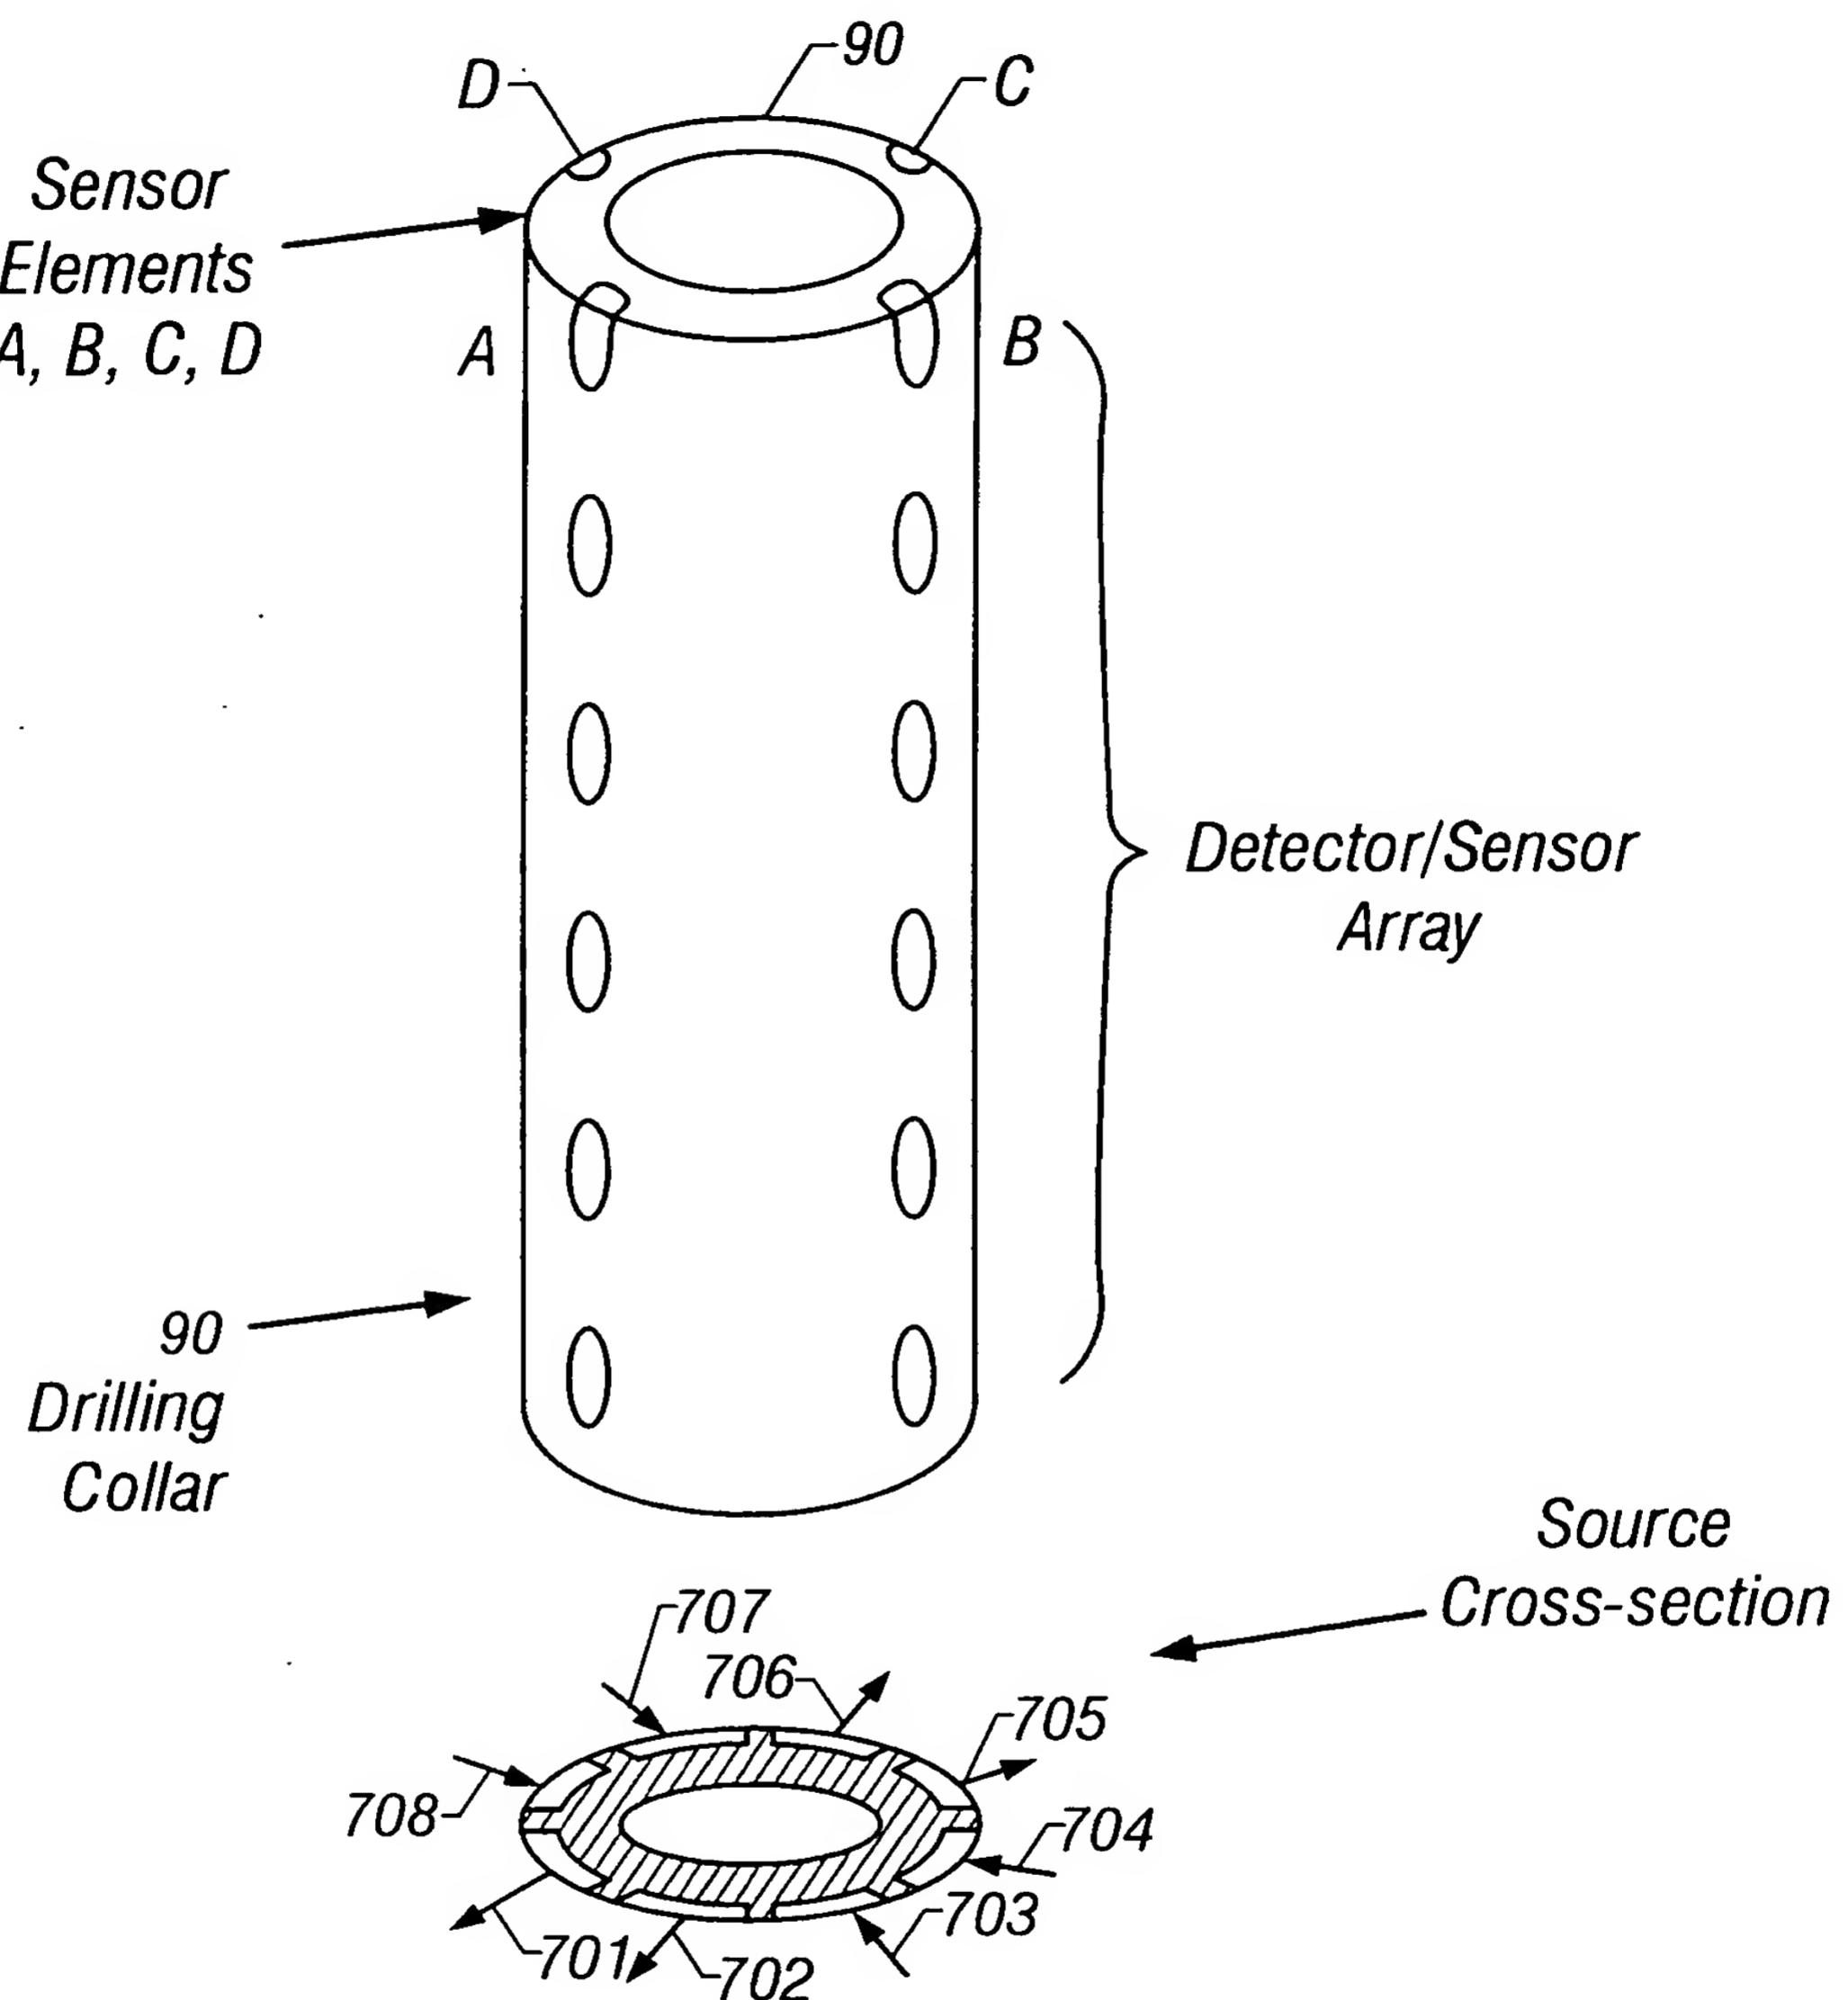


FIG. 10

11/16

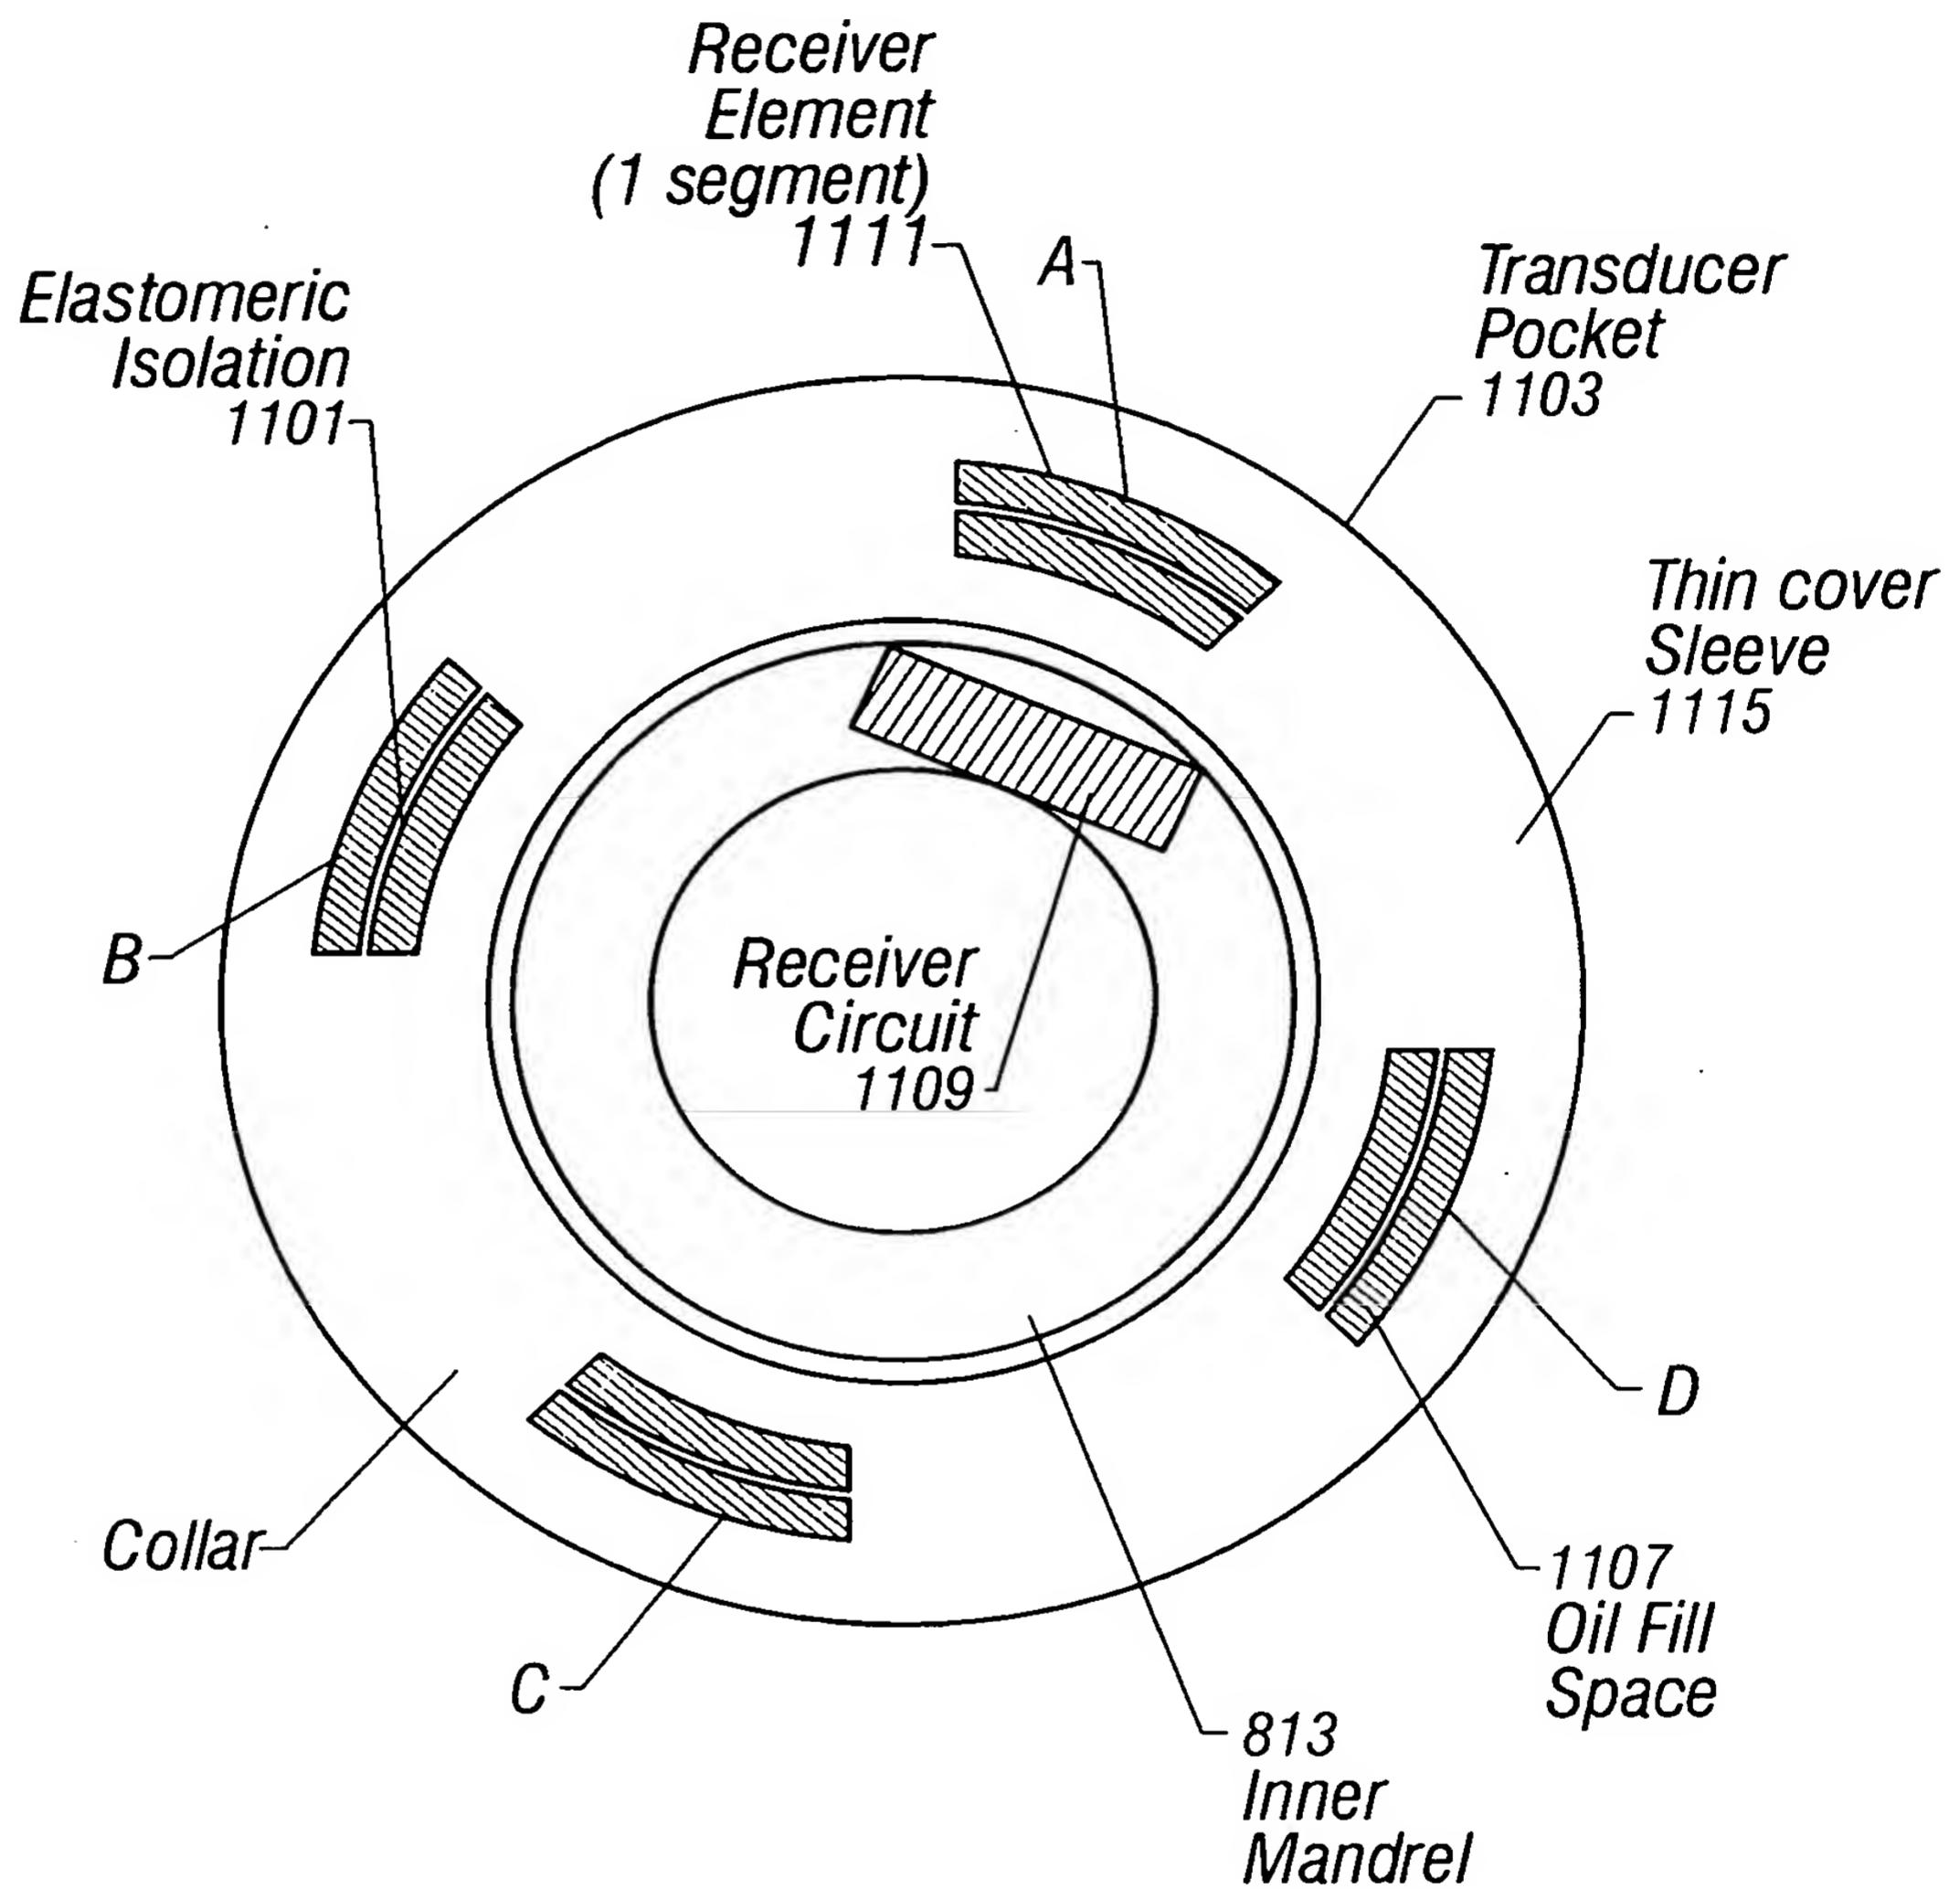


FIG. 11

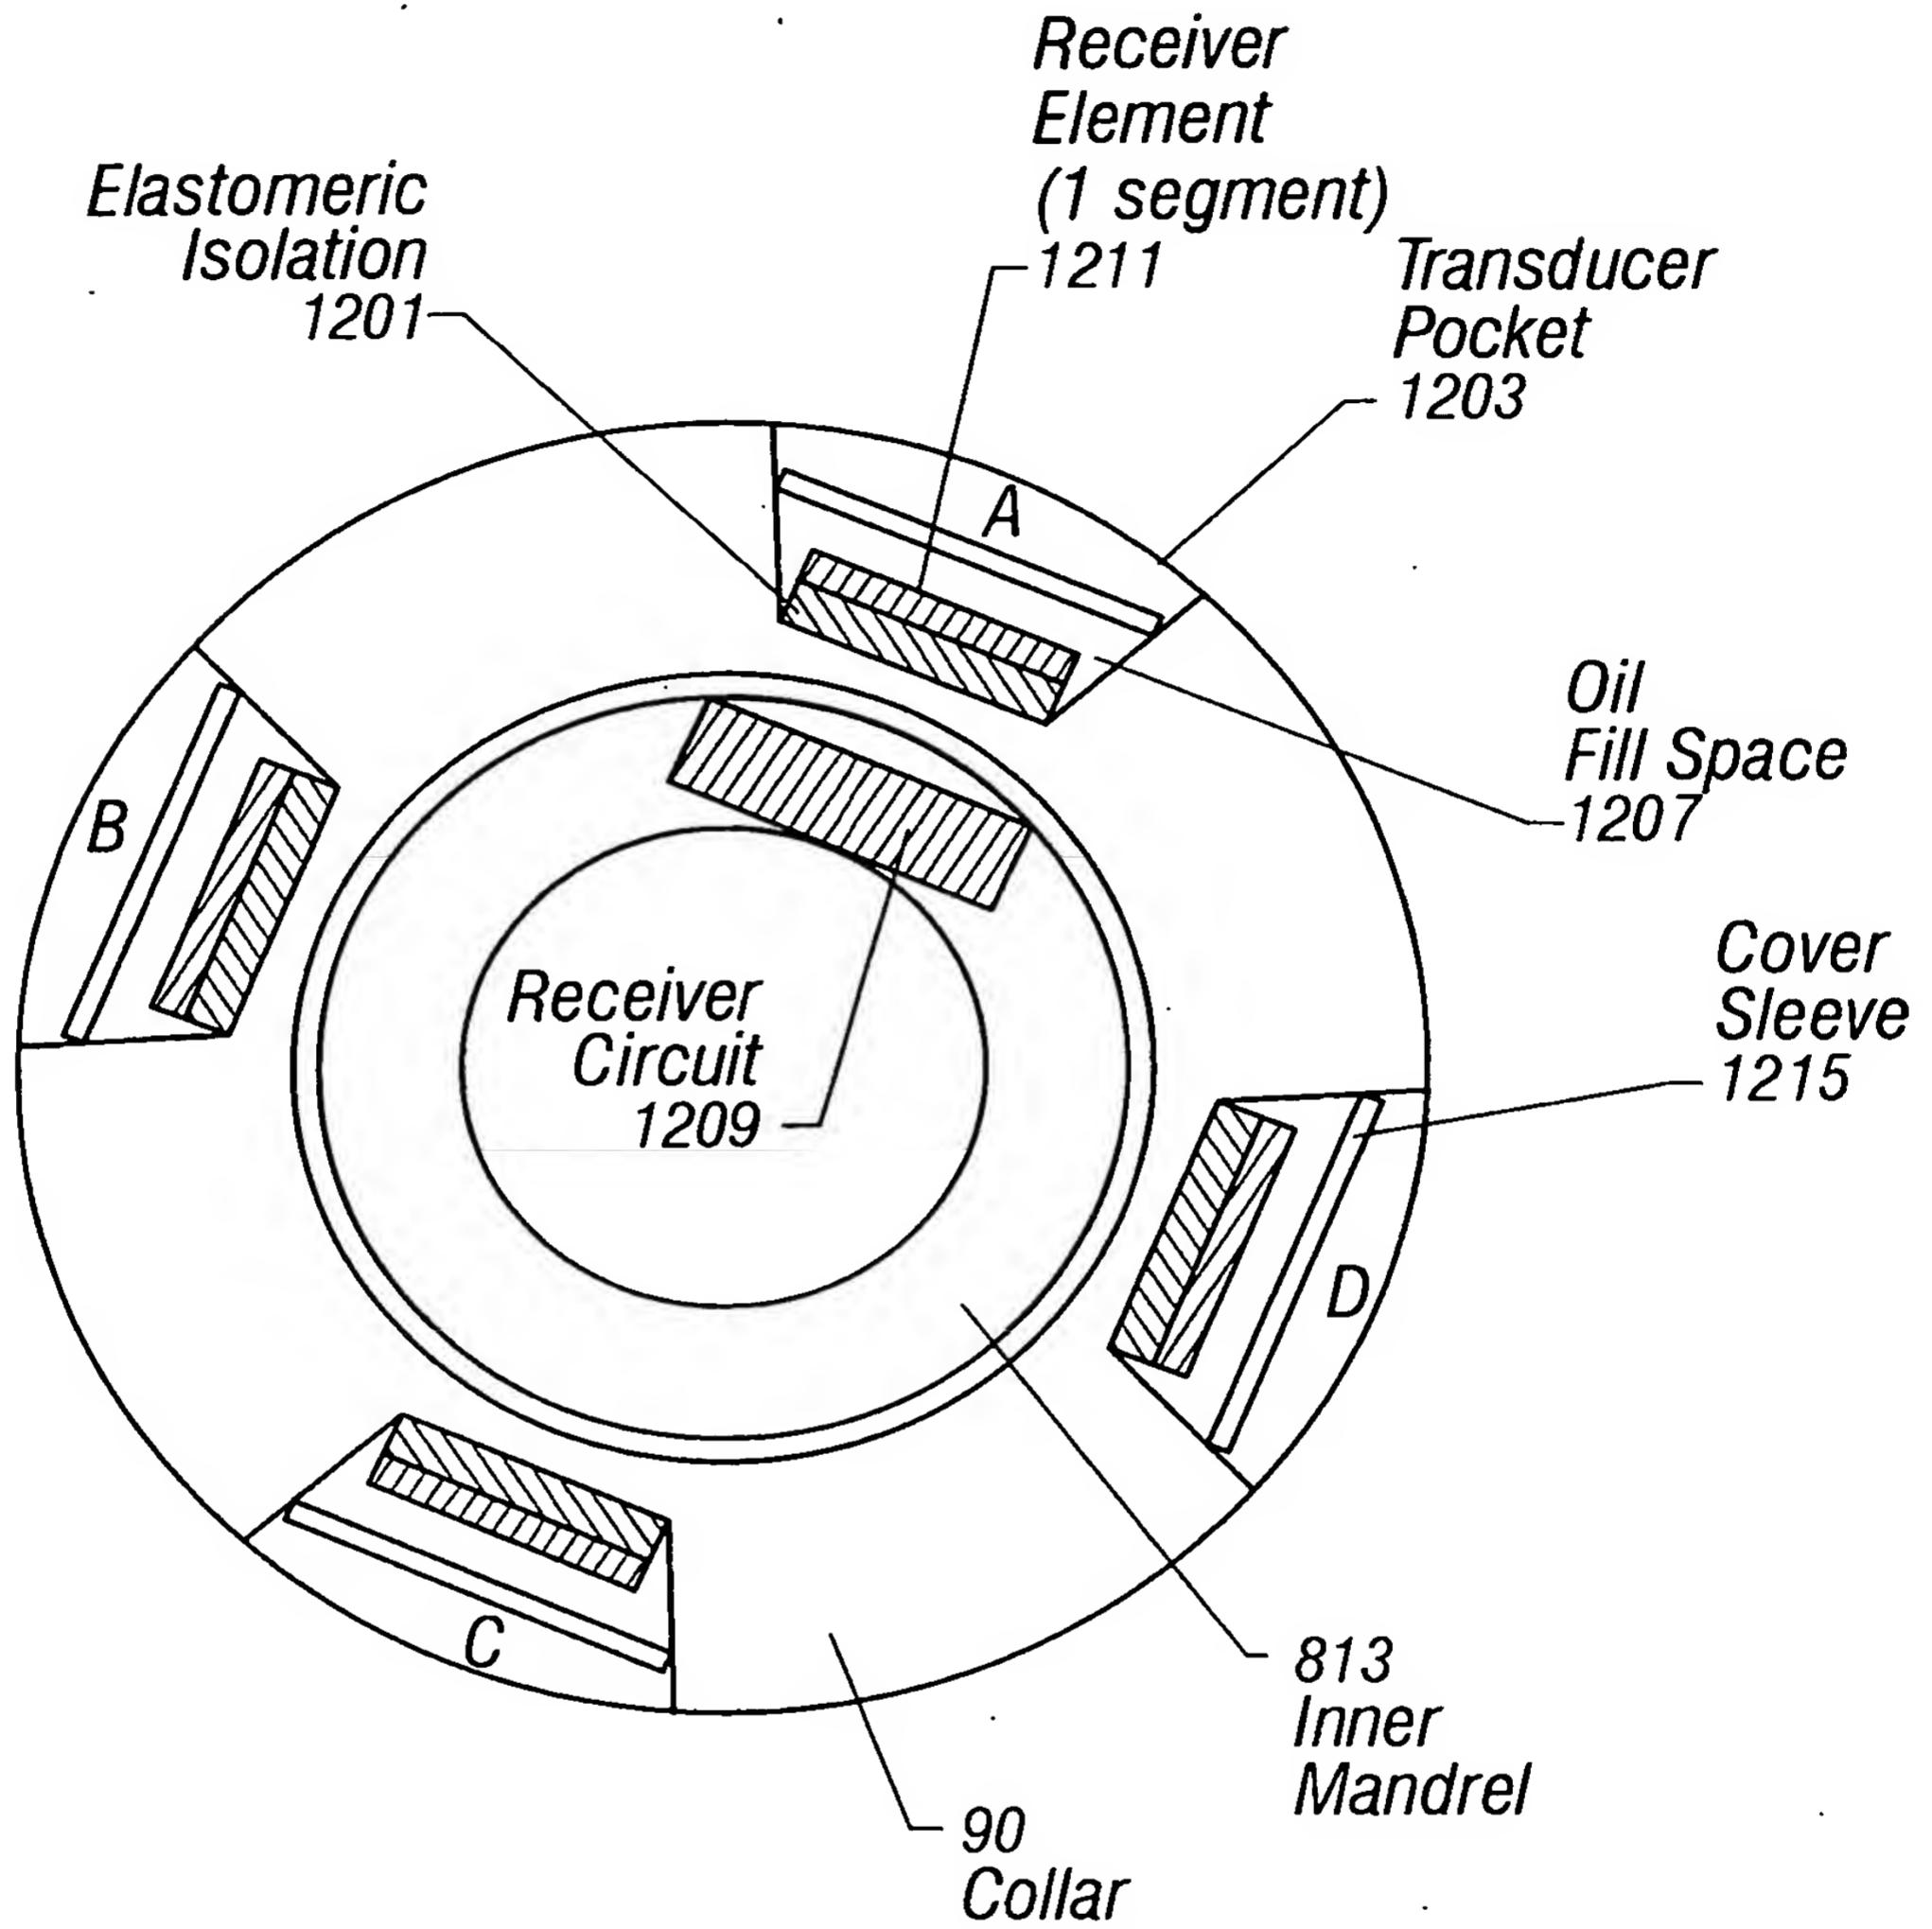


FIG. 12

13/16

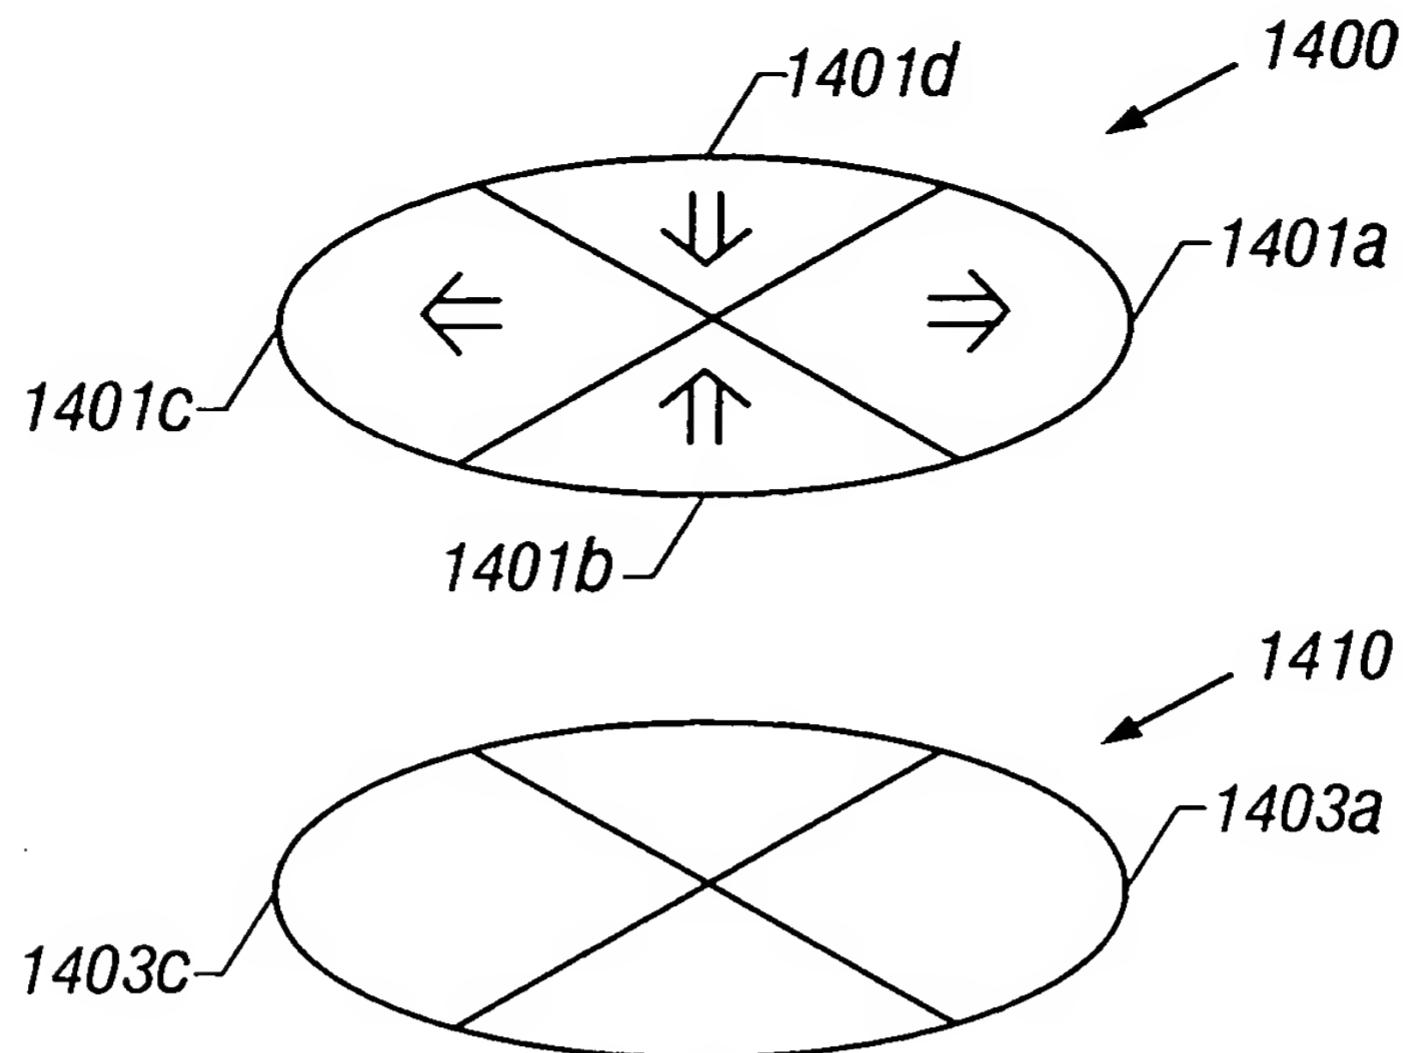


FIG. 13A

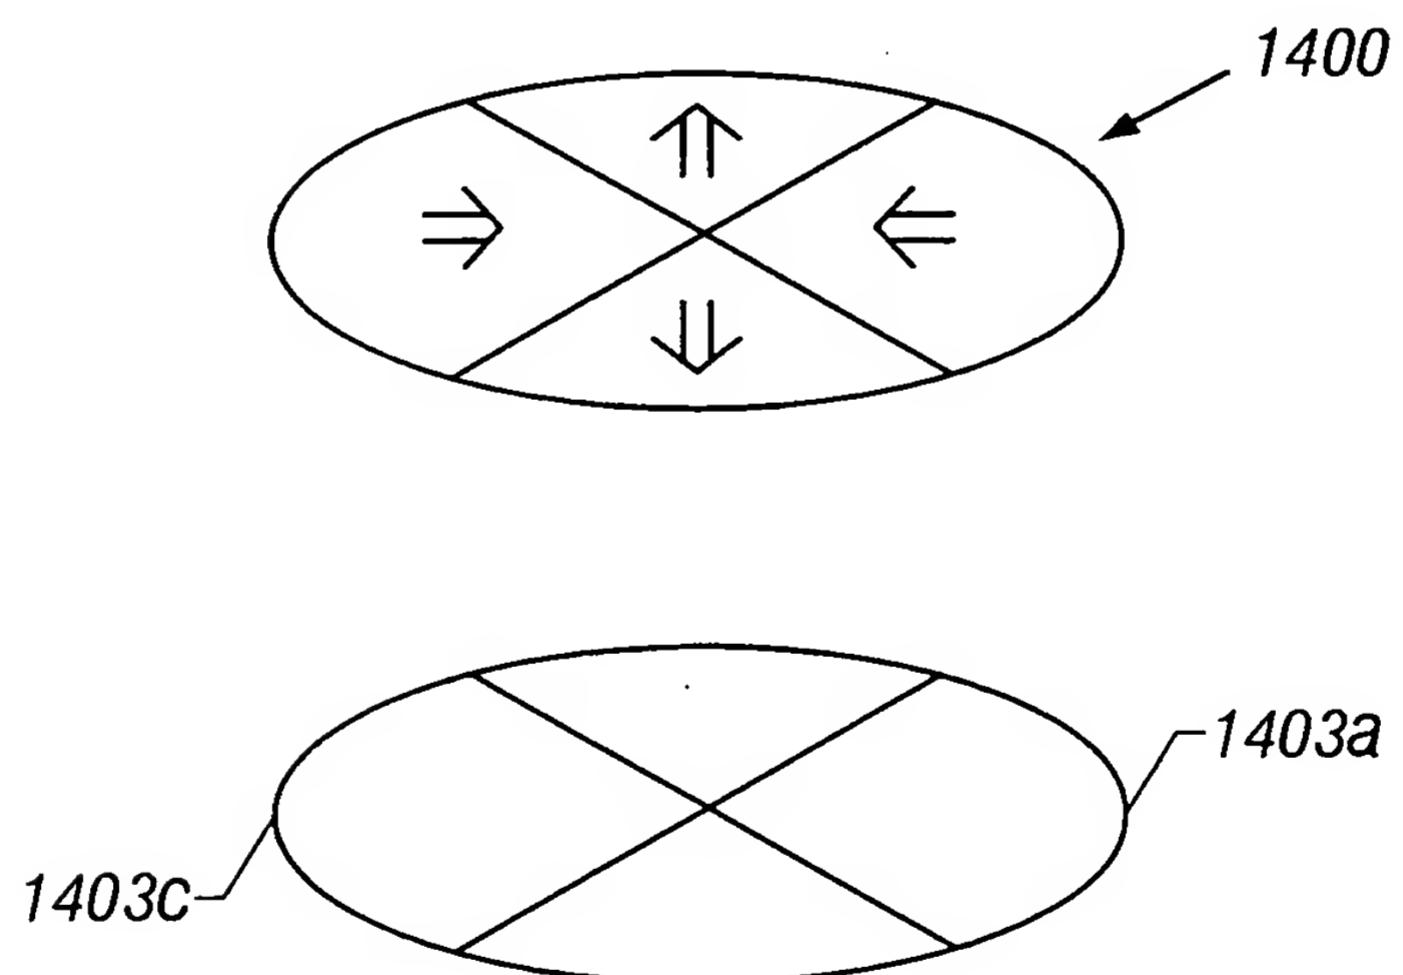


FIG. 13B

14/16

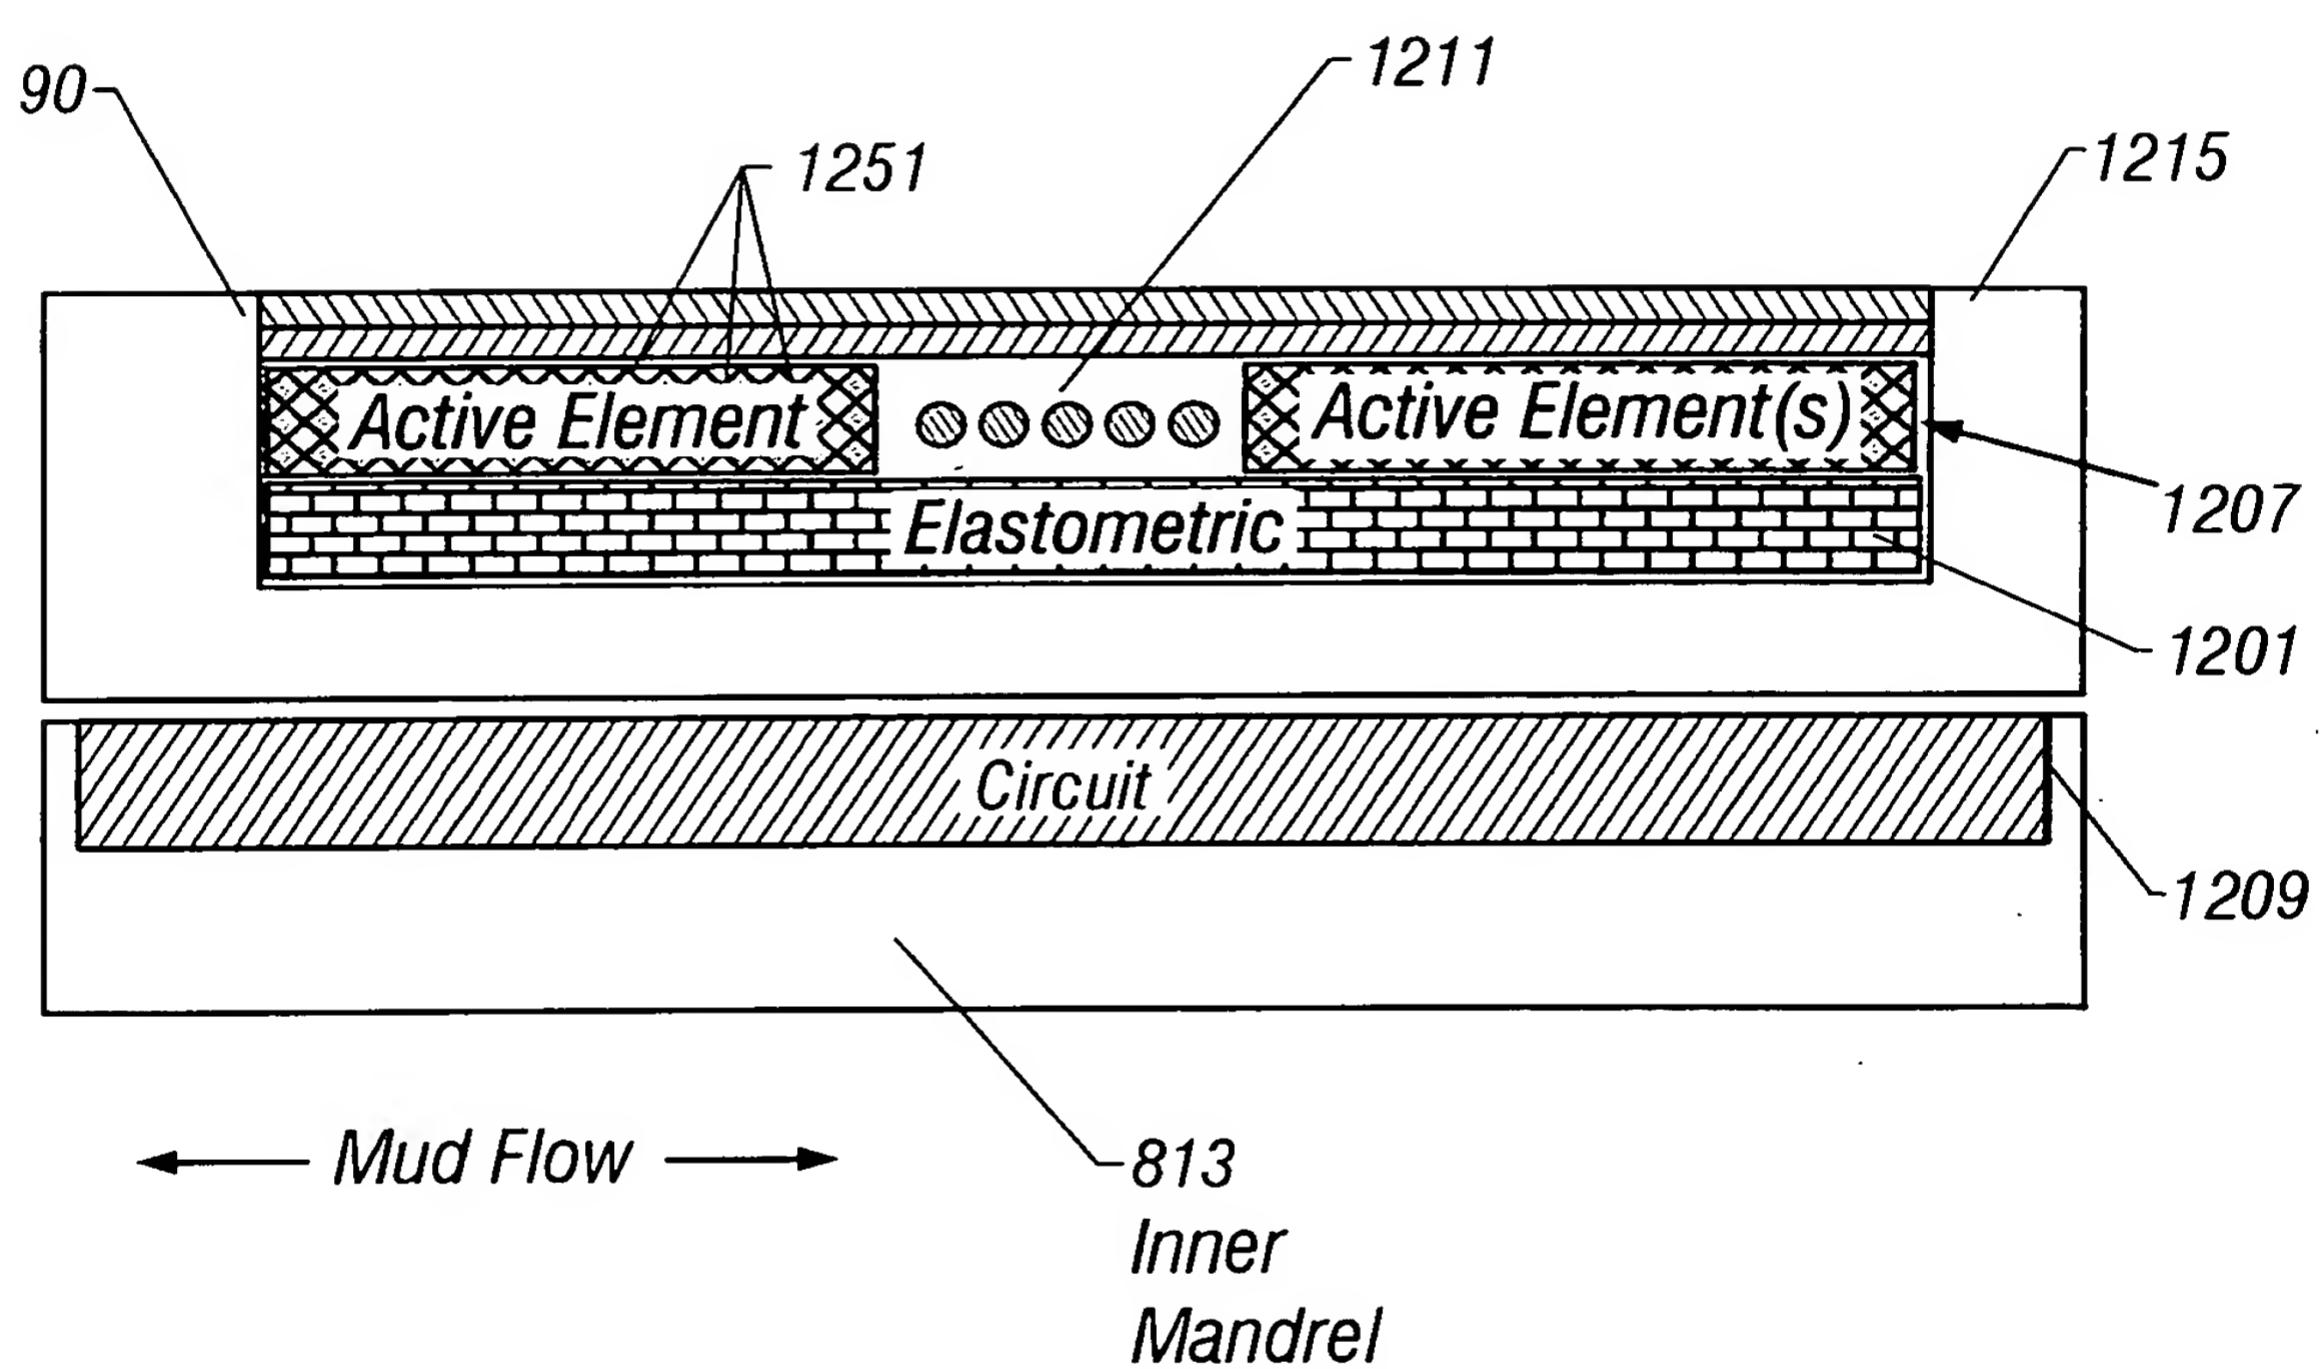


FIG. 14

15/16

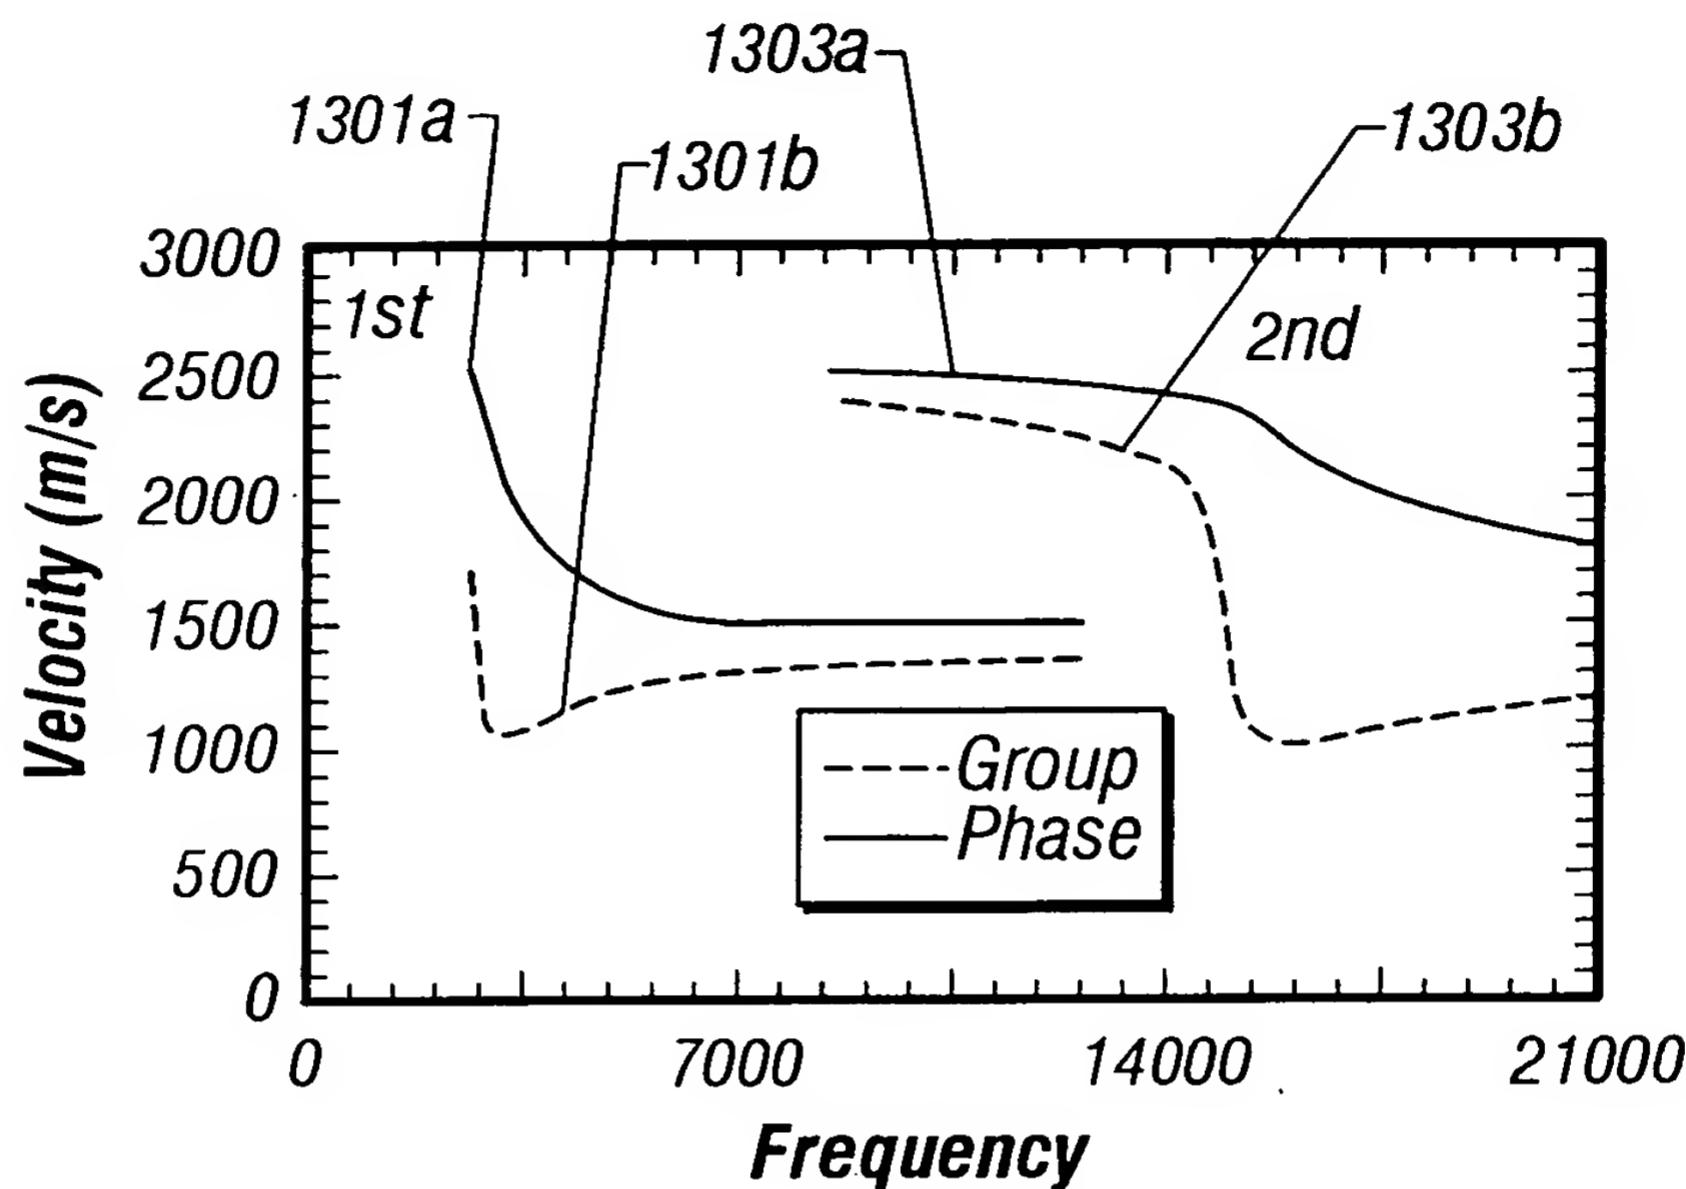


FIG. 15A

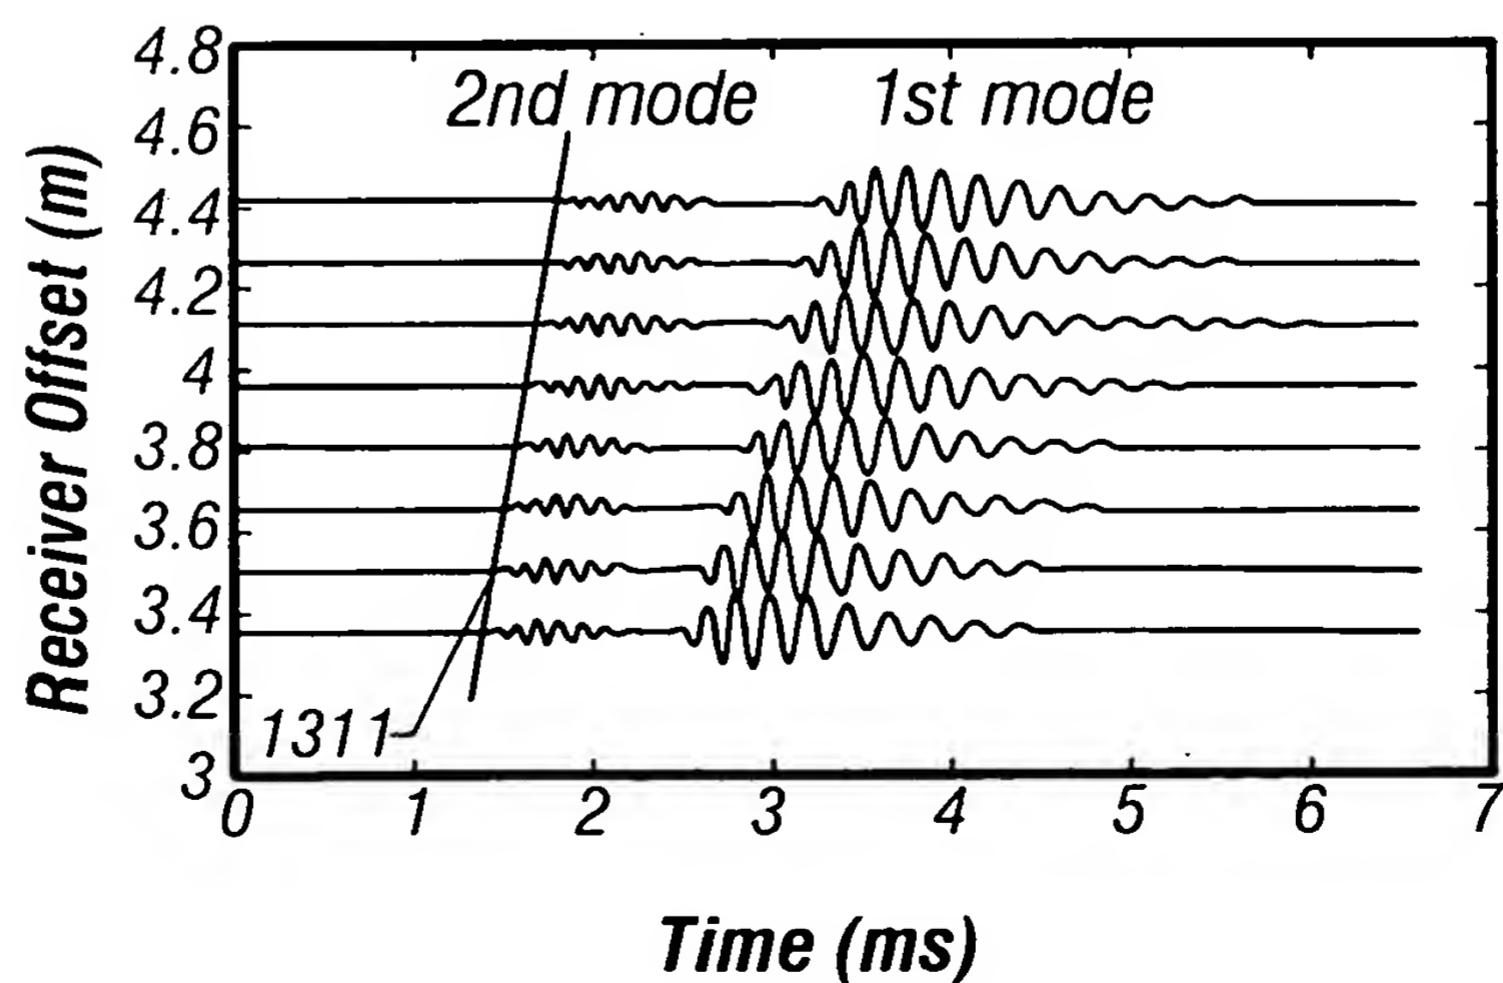


FIG. 15B

Inventor: Xiaoming Tang et al.
Serial No.: 10/045,263; Filed: November 7, 2001
Title: Method and Apparatus for LWD Shear Velocity Measurement
Docket No.: 414-23747-US

16/16

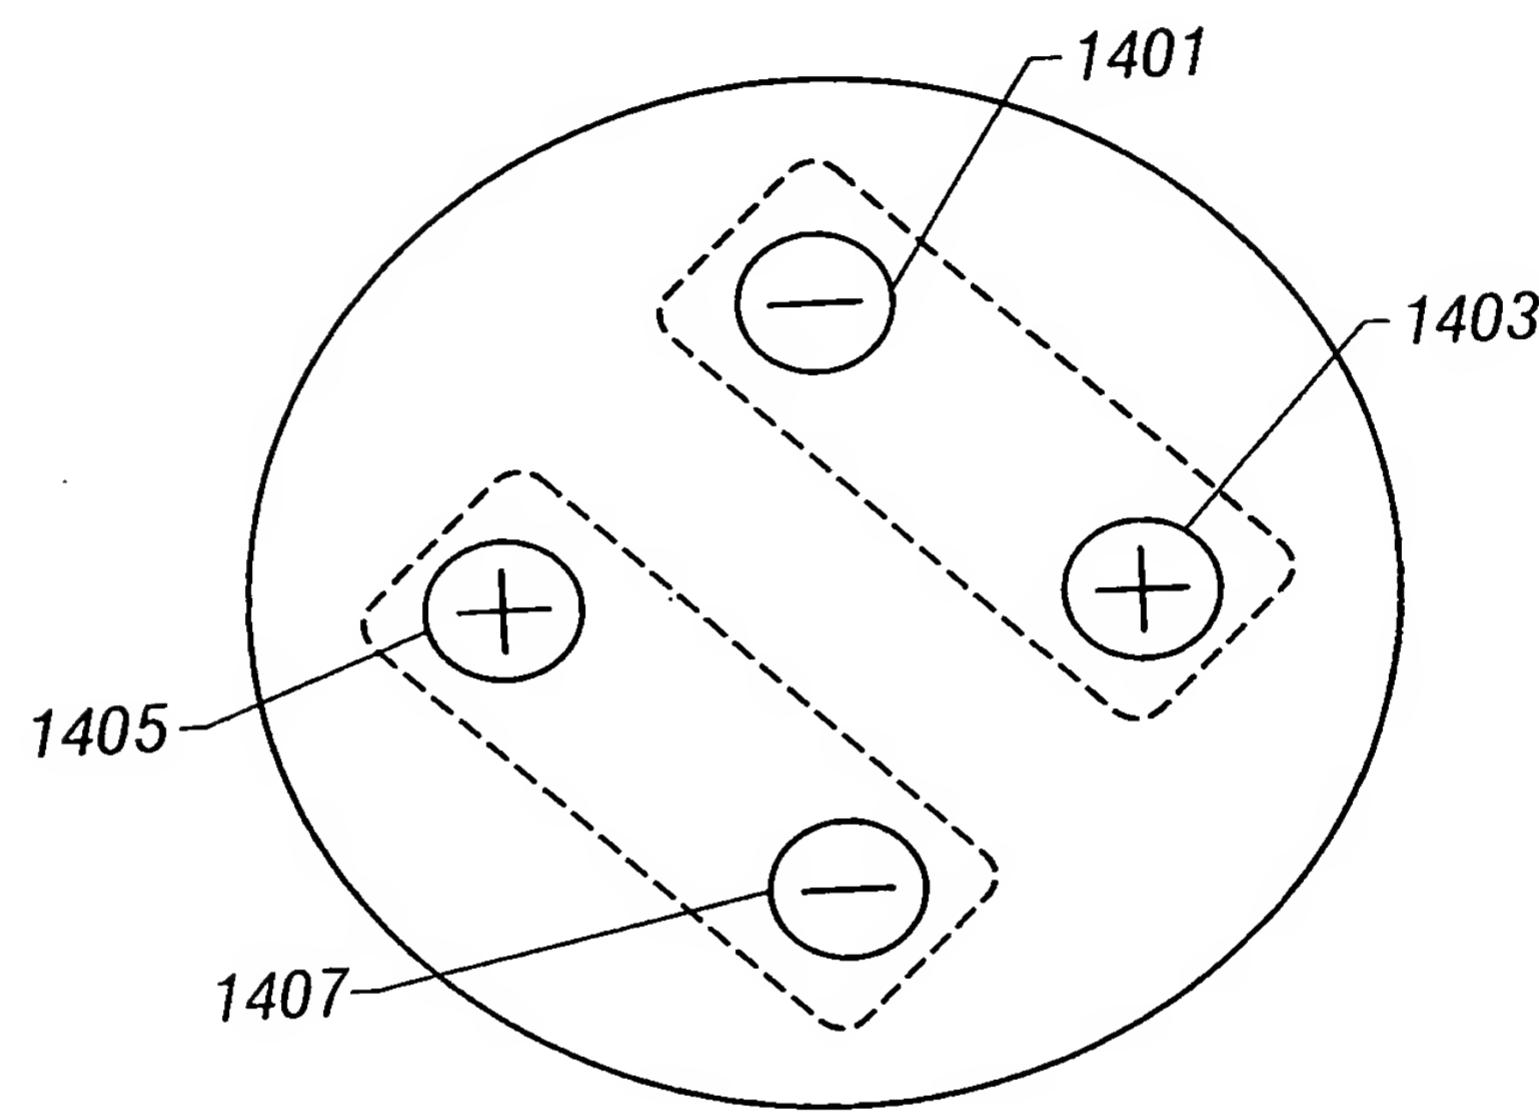


FIG. 16